


# HSK-K-Flex

Item number 1293210115

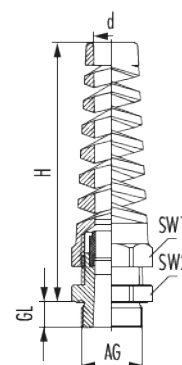

## Technical data

<b>Material</b>	Polyamide
<b>Seal</b>	NBR
<b>Protection class</b>	IP 54 , IP 68 with additional O-ring:IP68 - 10bar/30min , IP 69 K
<b>Temperature range</b>	-40°C to +100°C
<b>Colour</b>	black
<b>RAL</b>	9005
<b>Variant</b>	PG
<b>External thread (AG)</b>	PG 21
<b>Cable diameter</b>	9 - 16 mm
<b>d</b>	20.02 mm
<b>Thread length (GL)</b>	11 mm
<b>Height (H)</b>	114 mm
<b>Wrench size (SW1/SW2)</b>	33/33 mm
<b>Tightening torque</b>	4 Nm
<b>Type Rating by</b>	12 , 4 , 4X , 6 (with additional O-ring) , UL 50E



Dimensions and specifications may be changed without prior notice



[www.hummel.com](http://www.hummel.com)

# HSK-K-Flex

Item number 1293210115

## Commercial data

Packaging Unit	20
EAN code	4033878417638
Weight	0.04145 kg
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-32
Customs tariff number	39269097

Note:



Dimensions and specifications may be changed without prior notice



[www.hummel.com](http://www.hummel.com)