


# HSK-M-Flex

Item number 1623120050

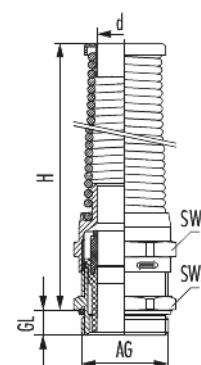

## Technical data

|                       |                                |
|-----------------------|--------------------------------|
| Material              | Nickel-plated brass            |
| Steel spring          | INOX 1.4310                    |
| Clamping insert       | Polyamide V0 according to UL94 |
| Seal                  | NBR                            |
| Material o-ring       | NBR                            |
| Protection class      | IP68 - 10bar/30min , IP 69 K   |
| Type Rating by        | 4 , 4X , 6 , UL 50E            |
| Temperature range     | -40°C to +100°C                |
| Variant               | Metric                         |
| External thread (AG)  | M12 x 1,5                      |
| Cable diameter        | 3 - 6,5 mm                     |
| d                     | 6.8 mm                         |
| Thread length (GL)    | 6.5 mm                         |
| Height (H)            | 55 mm                          |
| Wrench size (SW1/SW2) | 14/14 mm                       |
| Tightening torque     | 4 Nm                           |



# HSK-M-Flex

Item number 1623120050

## Commercial data

|                       |               |
|-----------------------|---------------|
| Packaging Unit        | 50            |
| EAN code              | 4033878432914 |
| Weight                | 0.0215 kg     |
| ETIM 7                | EC000441      |
| ETIM 8                | EC000441      |
| ETIM 9                | EC000441      |
| eCl@ss 10.1           | 27-14-44-32   |
| Customs tariff number | 74198090      |

Note:

