


HSK-INOX-PVDF-Ex

Item number 1662200051

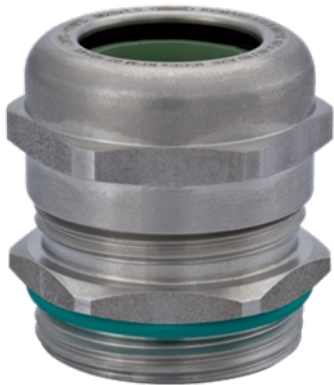

Technical data

| | |
|-----------------------|--|
| Material | INOX 1.4305 |
| Clamping insert | PVDF |
| Seal | FKM |
| Material o-ring | FKM |
| Protection class | IP68 - 10bar/30min , IP 69 K |
| Type Rating by | 4 , 4X , 6 , UL 50E |
| Ex-protection level | II 1D Ex ta IIIC Da , II 2G Ex eb IIC Gb |
| Temperature range | -20°C to +130°C |
| Variant | Metric |
| External thread (AG) | M20 x 1,5 |
| Cable diameter | 7 - 12 mm |
| Thread length (GL) | 6 mm |
| Height (H) | 23 mm |
| Wrench size (SW1/SW2) | 24/24 mm |
| Tightening torque | 10 Nm |



HSK-INOX-PVDF-Ex

Item number 1662200051

Commercial data

| | |
|-----------------------|---------------|
| Packaging Unit | 10 |
| EAN code | 4033878438299 |
| Weight | 0.03109 kg |
| ETIM 7 | EC000441 |
| ETIM 8 | EC000441 |
| ETIM 9 | EC000441 |
| eCl@ss 10.1 | 27-14-44-34 |
| Customs tariff number | 73269098 |

Note:



Dimensions and specifications may be changed without prior notice



www.hummel.com