
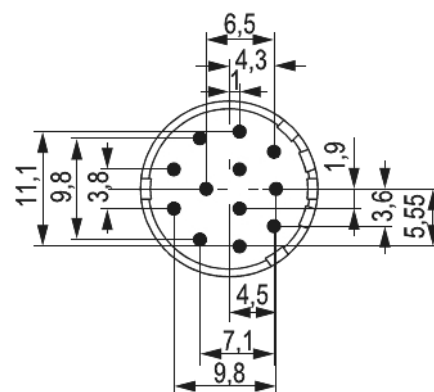


Contact insert M23 Signal - 12-pole (solder in)

Item number 7001912108

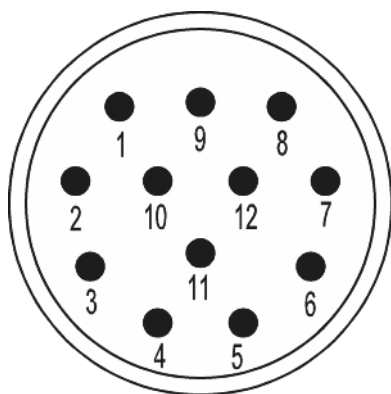

Technical data

| | |
|---|-------------------|
| Characteristic of connection | PCB assembly |
| Number of poles | 12 |
| Pole picture | 12 |
| | Pinout clockwise |
| Dip solder contacts length | 10 mm |
| Insert | Socket |
| Color contact insert | white |
| Material insulating body | PA 6 , PBT |
| Number of contacts signal | 12 |
| Contact-Ø signal | 1 mm |
| Nominal current signal | 8 A |
| Nominal voltage at degree of pollution 3 signal | 200 V~ |
| Test voltage signal | 840 V~ |
| Insulation resistance signal | > 10 ⁸ |
| max. contact resistance signal | 3 mOhm |



Contact insert M23 Signal - 12-pole (solder in)

Item number 7001912108

Temperature range -40°C to +125°C

Degree of Protection 3

Flammability V-0 (UL 94)



Contact insert M23 Signal - 12-pole (solder in)

Item number 7001912108

Commercial data

| | |
|-----------------------|---------------|
| Packaging Unit | 25 |
| EAN code | 4033878500453 |
| Weight | 0.00246 kg |
| ETIM 7 | EC003557 |
| ETIM 8 | EC003557 |
| ETIM 9 | EC003557 |
| eCl@ss 10.1 | 27440223 |
| Customs tariff number | 85366930 |

Note:

