
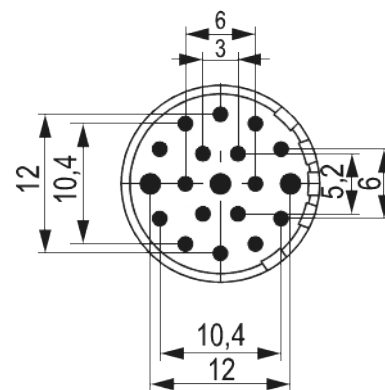


Contact insert M23 Signal - 19-pole (solder)

Item number 7001919113

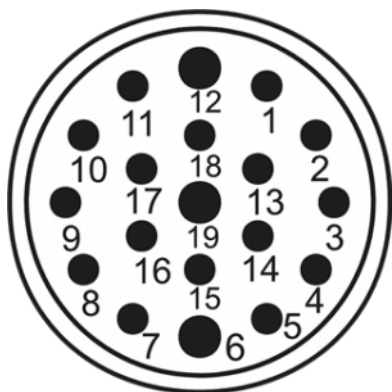

Technical data

Characteristic of connection	Solder
Number of poles	19
Pole picture	18 + PE (Pos. 12)
Coding	Pos. 12 PE
direction of rotation	Pinout clockwise
Insert	Pin
Color contact insert	white
Material insulating body	PA 6 , PBT
Number of contacts signal	16
Number of contacts power	3
Contact-Ø signal	1 mm
Contact-Ø power	1.5 mm
Nominal current signal	8 A
Nominal current power	10 A
Nominal voltage at degree of pollution 3 signal	110 V [~]

Contact insert M23 Signal - 19-pole (solder)

Item number 7001919113

Nominal voltage at degree of pollution 3 power	110 V~
Test voltage signal	840 V~
Test voltage power	840 V~
Insulation resistance signal	$> 10^8 \Omega$
Insulation resistance power	$> 10^8 \Omega$
max. contact resistance signal	3 mOhm
max. contact resistance power	3 mOhm
Temperature range	-40°C to +125°C
Degree of Protection	3
Flammability	V-0 (UL 94)

Contact insert M23 Signal - 19-pole (solder)

Item number 7001919113

Commercial data

Packaging Unit	25
EAN code	4033878500699
Weight	0.01055 kg
ETIM 7	EC003557
ETIM 8	EC003557
ETIM 9	EC003557
eCl@ss 10.1	27440223
Customs tariff number	85369010

Note:

