
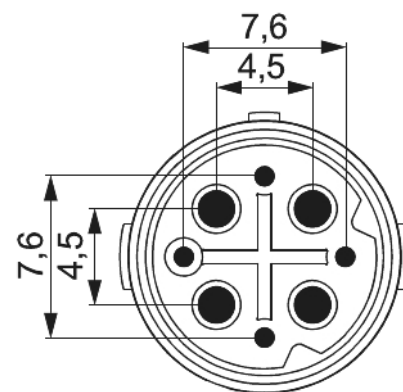


# Contact insert M16 - 8-pole (solder in)

Item number 7001943108

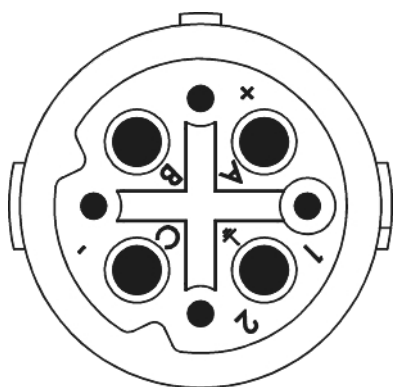

## Technical data

Characteristic of connection	PCB assembly
Number of poles	8
Pole picture	4 + 3 + PE
Coding	PE
Dip solder contacts length	10 mm
Insert	Socket
Material insulating body	PA 6 , PBT
Number of contacts signal	4
Number of contacts power	3
Number of contacts PE	1
Contact-Ø signal	0.8 mm
Contact-Ø power	1.6 mm
Nominal current signal	5 A
Nominal current power	16 A
Nominal voltage at degree of pollution 3 signal	160 V~

## Contact insert M16 - 8-pole (solder in)

Item number 7001943108

Nominal voltage at degree of pollution 3 power	320 V~
Test voltage signal	1500 V~
Test voltage power	1500 V~
Insulation resistance signal	$> 10^8$
Insulation resistance power	$> 10^8$
max. contact resistance signal	3 mOhm
Temperature range	-40°C to +125°C
Degree of Protection	3
Flammability	V-0 (UL 94)

# Contact insert M16 - 8-pole (solder in)

Item number 7001943108

## Commercial data

Packaging Unit	25
EAN code	4033878500828
Weight	0.05687 kg
ETIM 7	EC003557
ETIM 8	EC003557
ETIM 9	EC003557
eCl@ss 10.1	27440223
Customs tariff number	85366930

Note:

