
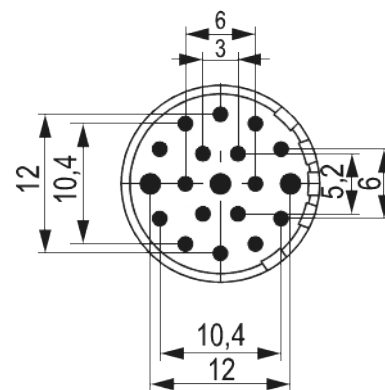


# Contact insert M23 Signal - 19-pole

Item number 7003919102

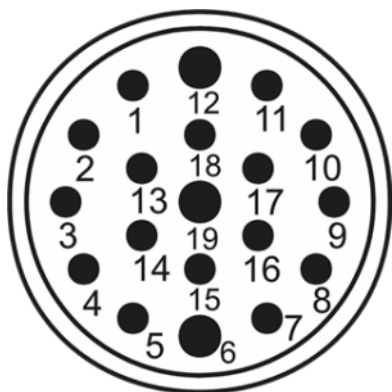

## Technical data

Characteristic of connection	Crimp
Number of poles	19
Pole picture	19
direction of rotation	Pinout clockwise
Insert	Socket
Color contact insert	white
Material insulating body	PA 6 , PBT
Number of contacts signal	16
Number of contacts power	3
Contact-Ø signal	1 mm
Contact-Ø power	1.5 mm
Terminal cross section power	0,14 - 1 mm <sup>2</sup>
Nominal current signal	8 A
Nominal current power	10 A
Nominal voltage at degree of pollution 3 signal	110 V <sup>~</sup>



# Contact insert M23 Signal - 19-pole

Item number 7003919102

Nominal voltage at degree of pollution 3 power	110 V~
Test voltage signal	370 V~
Test voltage power	840 V~
Insulation resistance signal	$> 10^8 \Omega$
Insulation resistance power	$> 10^8 \Omega$
max. contact resistance signal	3 mOhm
max. contact resistance power	3 mOhm
Temperature range	-40°C to +125°C
Degree of Protection	3
Flammability	V-0 (UL 94)



# Contact insert M23 Signal - 19-pole

Item number 7003919102

## Commercial data

<b>Packaging Unit</b>	25
<b>EAN code</b>	4033878501443
<b>Weight</b>	0.00327 kg
<b>ETIM 7</b>	EC003557
<b>ETIM 8</b>	EC003557
<b>ETIM 9</b>	EC003557
<b>eCl@ss 10.1</b>	27440223
<b>Customs tariff number</b>	85469010

Note:

