
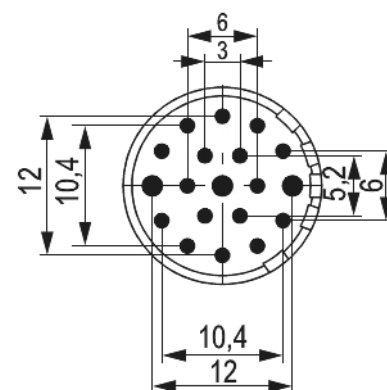


# Contact insert M23 Signal - 19-pole

Item number 7003919112

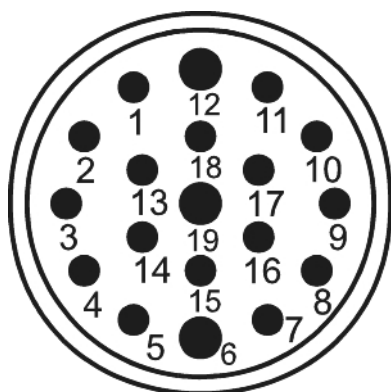

## Technical data

Characteristic of connection	Crimp
Number of poles	19
Pole picture	18 + PE (Pos. 12)
Coding	Pos. 12 PE
	Pinout clockwise
Insert	Socket
Color contact insert	white
Material insulating body	PA 6 , PBT
Number of contacts signal	16
Number of contacts power	3
Contact-Ø signal	1 mm
Contact-Ø power	1.5 mm
Terminal cross section power	0,14 - 1 mm <sup>2</sup>
Nominal current signal	8 A
Nominal current power	10 A

# Contact insert M23 Signal - 19-pole

Item number 7003919112

Nominal voltage at degree of pollution 3 signal	100 V~
Nominal voltage at degree of pollution 3 power	100 V~
Test voltage signal	1500 V~
Test voltage power	1500 V~
Insulation resistance signal	$> 10^6$
Insulation resistance power	$> 10^6$
max. contact resistance signal	3 mOhm
max. contact resistance power	3 mOhm
Temperature range	-40°C to +125°C
Degree of Protection	3
Flammability	V-0 (UL 94)

# Contact insert M23 Signal - 19-pole

Item number 7003919112

## Commercial data

Packaging Unit	25
EAN code	4033878501467
Weight	0.00601 kg
ETIM 7	EC003557
ETIM 8	EC003557
ETIM 9	EC003557
eCl@ss 10.1	27440223
Customs tariff number	85469010

Note:

