


Housing incl. Insert TWILOCK-S coupler connector M40 Power - 2+6+4+PE

Item number 771676200S

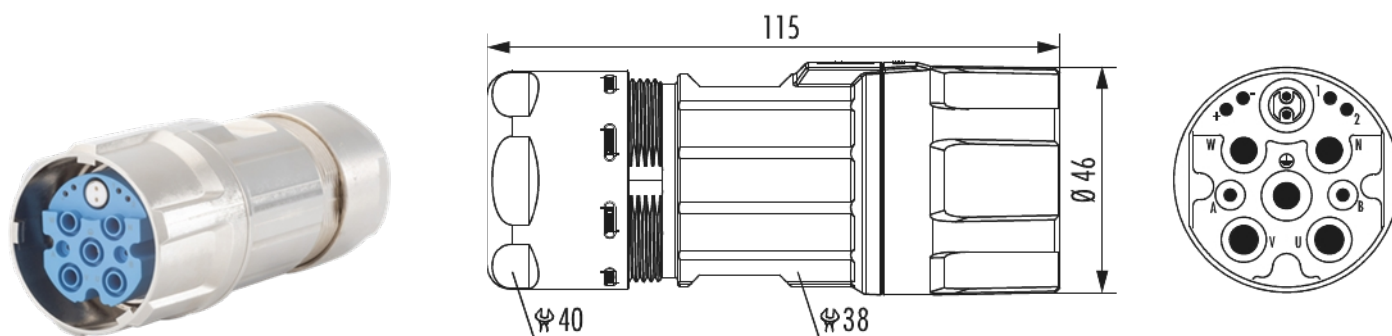

Technical data

Housing type	Cable
Material housing	brass , Zinc Die Cast
Material housing surface	Nickel
Insert	Socket
Version	TWILOCK-S
TWILOCK thread	M40 x 1,5
TWILOCK/TWILOCK-S-Ø plug-in side	46 mm
Shield	shielded
Seal type	O-Ring
Material seals/o-rings	NBR
Cable diameter	17 - 24 mm
Length (L)	115 mm
Wrench size (SW1/SW2)	40/38 mm
Temperature range	-40 °C to +125 °C
Degree of Protection	3



Housing incl. Insert TWILOCK-S coupler connector M40 Power - 2+6+4+PE

Item number 771676200S

Protection class	IP 67 , IP 69 K
Characteristic of connection	Crimp
Number of poles	13
Pole picture	2 + 6 + 4 + PE
Color Ethernet insert	white
Color contact insert	blue
Material insulating body	PBT
Material Ethernet insert	PA 6
Number of contacts data	2
Number of contacts signal	6
Number of contacts power	4
Number of contacts PE	1
Contact-Ø data	1 mm
Contact-Ø signal	1 mm
Contact-Ø power	3.6 mm
Terminal cross section data	0,14 – 1 mm ²
Terminal cross section signal	0,14 – 1,5 mm ²
Terminal cross section power	2,5 – 16 mm ²
Crimp range	0.14 – 16 mm ²
Nominal current data	1,2 A
Nominal current signal	7 A
Nominal current power	55 A
Nominal voltage at degree of pollution 3 data	30 V~



Housing incl. Insert TWILOCK-S coupler connector M40 Power - 2+6+4+PE

Item number 771676200S

Nominal voltage at degree of pollution 3 signal	150 V~
Nominal voltage at degree of pollution 3 power	600 V~
Test voltage data	840 V~
Test voltage signal	840 V~
Test voltage power	4000 V~
Insulation resistance data	10 ⁸
Insulation resistance signal	10 ⁸
Insulation resistance power	10 ⁸
max. contact resistance data	0,003 mOhm
max. contact resistance signal	3 mOhm
max. contact resistance power	1 mOhm
Flammability	V-0 (UL 94)
Minimum mating cycles	> 500
Suitable data contacts	7015961002
Suitable Signal contacts	7015961002 , 7015961012
Suitable power contacts	7015963602 , 7015963612 , 7015963622 , 7015963632
Suitable PE-/FE-contacts	7015963602 , 7015963612 , 7015963622 , 7015963632



Housing incl. Insert TWILOCK-S coupler connector M40 Power - 2+6+4+PE

Item number 771676200S

Commercial data

Packaging Unit	5
EAN code	4033878012505
Weight	0.37972 kg
ETIM 7	EC002635
ETIM 8	EC002635
ETIM 9	EC002635
eCl@ss 10.1	27440102
Customs tariff number	85366990

Note:

