


# Contact insert M12 Power coding S

Item number A712-7S05931105

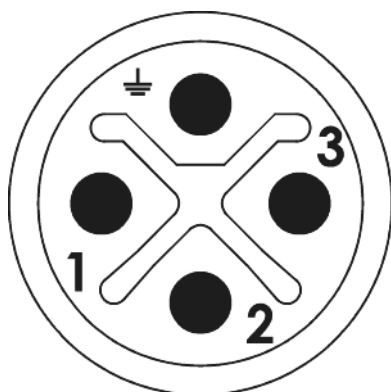

## Technical data

Characteristic of connection	Screw terminal
Number of poles	4
Pole picture	3 + PE
Coding	S
Insert	Pin
Color contact insert	black
Material Ethernet insert	-
Material insulating body	PBT
Number of contacts power	3
Number of contacts PE	1
Contact-Ø power	1.5 mm
Crimp range	-
Nominal current power	12 A
Nominal voltage at degree of pollution 3 power	630 V~
Test voltage power	3310 V~



# Contact insert M12 Power coding S

Item number A712-7S05931105

Insulation resistance data	-
Insulation resistance signal	-
Insulation resistance power	10 <sup>8</sup>
max. contact resistance power	3 mOhm
Temperature range	-40°C to +125°C
Degree of Protection	3
Flammability	V-0 (UL 94)
Suitable data contacts	-
Suitable Signal contacts	-

# Contact insert M12 Power coding S

Item number A712-7S05931105

## Commercial data

Packaging Unit	5
EAN code	4033878505427
Weight	0.01163 kg
ETIM 7	EC003557
ETIM 8	EC003557
ETIM 9	EC003557
eCl@ss 10.1	27440223
Customs tariff number	85366990

Note:

