


# Contact insert M12 Power coding T

Item number A712-7T05904106

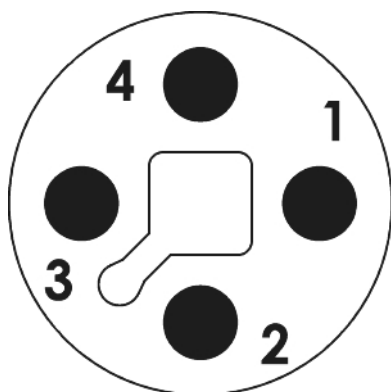

## Technical data

Characteristic of connection	Screw terminal
Number of poles	4
Pole picture	4
Coding	T
Insert	Socket
Color contact insert	dark grey
Material Ethernet insert	-
Material insulating body	PBT
Number of contacts power	4
Contact-Ø power	1.5 mm
Crimp range	-
Nominal current power	12 A
Nominal voltage at degree of pollution 3 power	63 V~
Test voltage power	840 V~
Insulation resistance data	-



# Contact insert M12 Power coding T

Item number A712-7T05904106

Insulation resistance signal	-
Insulation resistance power	10 <sup>8</sup>
max. contact resistance power	3 mOhm
Temperature range	-40 °C to +125 °C
Degree of Protection	3
Flammability	V-0 (UL 94)
Suitable data contacts	-
Suitable Signal contacts	-

# Contact insert M12 Power coding T

Item number A712-7T05904106

## Commercial data

Packaging Unit	5
EAN code	4033878505519
Weight	0.00532 kg
ETIM 7	EC003557
ETIM 8	EC003557
ETIM 9	EC003557
eCl@ss 10.1	27440223
Customs tariff number	85366990

Note:

