


SOLUTIONS FOR HEATING AND DRINKING WATER SYSTEMS

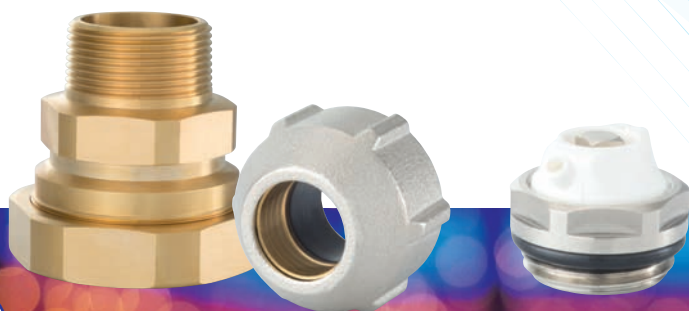

HUMMEL - reliable connection solutions for heating and sanitary

Drinking water systems

- // Steel pipe adapters
- // Compression fittings
- // Connecting parts + nipples

Heating systems

- // Connection technology
- // Radiator connections
- // Venting / Outflow

TABLE OF CONTENTS

Service 2

Contacts, Legend, etc.



Case assortment 12

Emergency service case 12

Steel pipe adapter case 14



Drinking water 17

Steel pipe adapters 18

Compression fittings 19

Connectors and nipples 24



Connection technology 29

Steel pipe adapters 30

Compression fittings 35

Connectors and nipples 40



Radiator connections 49

Diverter 50

Special connections 55

Flexible connections 63

Connection fittings 65

Thermostatic valves 77

Threaded-joint radiator returns 83

Thermostatic heads 87

Design fittings 88



Outflow 95

Outflow valves 96

FE valves 99

SFE valves 100

TABLE OF CONTENTS



Venting

105

- Air bleeder valves
- Automatic ventings

106

112



Plugs and reductions

115

- Reductions
- Plugs

116

118



Accessories

123

- Collars
- Air bleed key
- Tools
- Small parts

124

127

129

130

Spare Parts

137

Index

138

numeric, alphabetical

Technical Information

146

DIN regulations, guidelines, etc.

LEGEND

Abbreviations and Certificats

Abbreviations technical features

A1 [mm]	Length measure 1 in mm
A2 [mm]	Length measure 2 in mm
AG1	Length dimension 1
AG2	Length dimension 2
AG3	Length dimension 3
AG4	Length dimension 4
AM [mm]	Axial dimension in mm
AT1	Connection size 1
AT2	Connection size 2
AT3	Connection size 3
AT4	Connection size 4
B [mm]	Width in mm
GL1 [mm]	Thread length 1 in mm
GL2 [mm]	Thread length 2 in mm
H [mm]	Height in mm
Lv [mm]	Variable length in mm
L [mm]	Length in mm
R [mm]	Pipe dimension in mm
SW1 [mm]	Wrench size 1 in mm
SW2 [mm]	Wrench size 2 in mm
SW3 [mm]	Wrench size 3 in mm
SW4 [mm]	Wrench size 4 in mm
SW5 [mm]	Wrench size 5 in mm

Certificates



DVGW The German Technical and Scientific and Water Industry (DVGW) certifies the safety according to DIN 1988 in water supply



UBA All materials used comply with the hygienic specifications of the Federal Environment Agency (UBA)



H & T These products can be used in both heating and drinking water systems.



ÜA The ÜA mark (conformity Austria) is a legally prescribed proof for building products

Exemption from liability

Illustrations are non-binding, in particular with regard to the version, size and colour of the products. We reserve the right to make technical changes, as well as changes to dimensions and design. We reserve the right, without previous notice, to make appropriate and reasonable changes that serve technical progress, even to products that have already been ordered. The details and technical data contained in the catalogues, brochures and other written documentation, as well as on electronic storage media, or, for example, in drawings, sketches and proposals, should be checked by engineers or ordering parties. No claims whatsoever can be raised against HUMMEL AG because of these documents or from additional consulting services. Errors and omissions in this catalogue are the result of printer's errors and give no entitlement to reductions or anything else. No responsibility is taken for the correctness of this information.

Imprint

Graphics & Layout: HUMMEL AG, Marketing, Lise-Meitner-Str. 2, 79211 Denzlingen, Tel. +49 (0) 76 66 / 9 11 10-0, info@hummel.com

INSTALLATION VIDEOS

SpeedFIX compression fitting

With HUMMEL compression fittings, pipes and fittings can be securely connected in just three steps: Attach, tighten, fix.



Diverter

When changing radiators, there is always the problem of a reversed flow and return. Diverters ensure the correct direction of flow.




Steel pipe adapters

Steel pipe adapters are ideal for mounting radiators or other fittings to existing connections: no welding, no thread cutting.



Flexible radiator connections

This popular problem solver is always used when the pipe spacing to the new radiator no longer fits. For installation ranges from 65 to 410 millimetres.

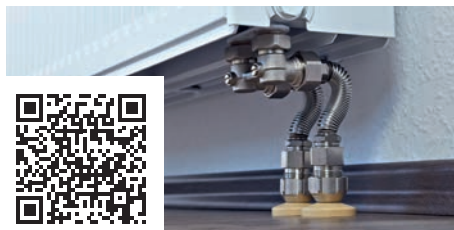

Emergency service case

With the emergency service case, plumbers have compression fittings for all common pipe types on board and are thus prepared for all eventualities.



Steel pipe adapter for drinking water systems

This steel pipe adapter is DVGW-certified and thus meets all hygienic requirements for safe use in drinking water systems.



For heating and drinking water systems

Connection solutions from HUMMEL AG can be used in both heating and drinking water systems. The products are made of UBA-compliant materials and thus fulfil relevant hygiene requirements of the Federal Environment Agency. The range includes compression fittings, connection parts, nipples and steel pipe adapters.

One solution for two systems — this principle brings numerous advantages:

- // More safety for the craftsman
- // No risk of confusion on the construction site
- // Simple and uncomplicated procurement
- // Lean and clear stock-keeping
- // Simple assembly without special tools in both systems




These problem solvers belong in every service van

Every tradesman knows the situation: emergency service call! After a pipe burst, a leak must be sealed; pipe type and pipe dimension are not known. If you have HUMMEL problem solvers in your service van in such situations, you can provide a quick solution. With compression fittings and connection parts, HUMMEL has the right solution in its range for almost every type of pipe.

However, renovations can also pose problems. Pipe transitions, height compensations or different distances are common challenges for all renovators.

Differing distances

- // Excenter for connection fittings
- // Flexible radiator connections
- // Reductions

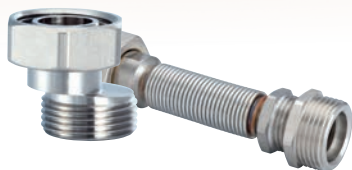

Different pipe connections

- // Compression fittings MKV-K, MKV-M, SpeedFIX
- // For plastic, composite and metal pipes
- // Connecting parts and nipples



Height compensation

- // Cone adapters
- // Telescopic connections
- // Extensions for connection fittings



Interchanged flow and return

- // Deflection pieces
- // Straight-through or corner form
- // For one and two pipe systems



MKV-K: 28 new renovation sets

These renovation sets belong in every service vehicle! They offer the right bolting solution for more than 70 different plastic and metal composite pipes. All common pipe diameters and wall and wall thicknesses are covered.

The way to the right solution is very simple. The specially developed, free MKV app is the ideal product finder: measure the pipe, enter the values, display the appropriate set, call up the data sheet and forward it if necessary.


The new fitting sets are specially designed to meet the needs of tradesmen in renovation work. The resealable packaging contains 10 multi-range compression fittings plus a suitable calibration tool. This pre-treats the pipes so that a secure and permanently reliable connection is guaranteed.



MKV-K Finder: The app for all cases



Quick and easy to find the right connection solution. It's so easy with the HUMMEL app: measure the pipe, enter the values, display the suitable connection solution and, if required, send it straight to your preferred dealer. The great thing about it: it works from anywhere. Whether on the construction site, in the service van, in the workshop or in the office.



Step 1: Measure

Simply measure the outside and inside diameter of the pipe to be processed with a caliper gauge



Step 2: Enter values

Open the HUMMEL app on your smartphone or PC. Transfer values to the input mask



Step 3: Display results

At the touch of a button, the desired solution appears with all the necessary technical information



Step 3: Display results

The technical data sheet is simply sent by e-mail to the preferred dealer



easy product selection
with the MKV-App



Prepared for all eventualities

Emergency service in the plumbing, heating and air-conditioning trade can quickly become an exceptional situation. A burst pipe at the weekend or on a public holiday, a leak in a rare type of pipe, damage in a hard-to-reach place - every tradesman knows these unforeseeable challenges.

It's good if you can then rely on the equipment in the service van. An indispensable component here: the HUMMEL emergency service case. This means that the tradesman always has the right compression fitting to hand. The range covers all common pipe sizes and types and thus always offers a quick solution for damaged areas.

The special feature here is that the compression fittings and connection parts can be used in heating systems as well as in drinking water systems. The products are certified according to the requirements of the Federal Environment Agency and thus fulfil all hygienic requirements for use in drinking water systems.

More safety in emergency service: a suitcase full of solutions

- // For heating and drinking water systems
- // MKV-K for plastic and metal composite pipes
- // MKV-M for copper, precision steel and stainless steel pipes
- // Simple installation without special tools
- // Suitable even for hard-to-reach areas



to the product video



Emergency service case

Item-No 2 810 0320 13



Article	AG1	AG2	Quantity	Item-No
Coupling nipple MKV	G 3/4	G 3/4	2 pieces	2 253 3434 00
Coupling nipple MKV	G 3/4	G 3/4	2 pieces	2 253 3434 01
Reduction piece MKV	G 1/2	G 3/4	2 pieces	2 254 1244 01
Reduction piece	G 5/8	G 3/4	2 pieces	2 254 5834 01
Connecting nipple	G 3/4	G 1/2	2 pieces	2 554 1234 00
Connecting nipple	G 3/4	G 1/2	2 pieces	2 554 1234 01
Connecting nipple	G 3/4	G 3/4	2 pieces	2 554 3434 00
Sealing cap	G 3/4	—	2 sets	2 810 0279 13
Compression fitting MKV-M	G 3/4	10 — 12 mm	1 set	2 855 0001 01
Compression fitting MKV-M	G 3/4	13 — 15 mm	1 set	2 855 0002 01
Compression fitting MKV-M	G 3/4	16 — 18 mm	1 set	2 855 0003 01
Compression fitting MKV-K	G 3/4	12 x 2 mm	1 set	2 862 1202 01
Compression fitting MKV-K	G 3/4	14 x 2 mm	1 set	2 862 1402 01
Compression fitting MKV-K	G 3/4	16 x 2 mm	1 set	2 862 1602 01
Compression fitting MKV-K	G 3/4	16 x 2.25 mm	1 set	2 862 1622 01
Compression fitting MKV-K	G 3/4	17 x 2 mm	1 set	2 862 1702 01
Compression fitting MKV-K	G 3/4	17 x 2.5 mm	1 set	2 862 1725 01
Compression fitting MKV-K	G 3/4	18 x 2 mm	1 set	2 862 1802 01
Compression fitting MKV-K	G 3/4	20 x 2 mm	1 set	2 862 2002 01
Compression fitting MKV-K	G 3/4	20 x 2.5 mm	1 set	2 862 2025 01
Compression fitting MKV-K	G 3/4	20 x 2.9 mm	1 set	2 862 2029 01

STEEL PIPE ADAPTER CASE

Service case Steel pipe adapter: simple, safe, clean

When replacing a radiator or installing a fitting, no one has to weld or cut threads any more. With the right steel pipe adapter, installation is simple, safe and above all: a clean affair. The steel pipe adapter is simply pushed onto the dirt-free pipe and tightened. This works even in the tightest spaces and under difficult installation conditions.

The specially designed HUMMEL service case is clearly equipped with many variants and sizes of steel pipe adapters. There are versions for fittings with Eurocone, internal or external thread. This means that the fitter always has the required version to hand and is prepared for any installation situation on site.

This service case saves time and long journeys

- // 11 steel tube adapter variants
- // All installation solutions just a handle away
- // High retention forces due to EPDM seal plus stainless steel claw
- // Maximum operating pressure: 10 bar
- // Operating temperature in heating systems: up to 120 °Celsius



to the product video



Steel pipe adapter case

Item-No 2 810 0320 20



Article	AG1	AG2	Quantity	Item-No
Steel pipe adapters with Eurocone internal thread	G 3/4	1/2	2 pieces	2 353 1234 01
Steel pipe adapters with Eurocone internal thread	G 3/4	3/8	2 pieces	2 353 3834 01
Steel pipe adapter with Eurocone external thread	G 3/4	1/2	2 pieces	2 354 1234 01
Steel pipe adapter with Eurocone external thread	G 3/4	3/4	2 pieces	2 354 3434 01
Steel pipe adapter with Eurocone external thread	G 3/4	3/8	2 pieces	2 354 3834 01
Steel pipe adapters with external thread	R 1	1	2 pieces	2 355 1010 01
Steel pipe adapters with external thread	R 1/2	1/2	2 pieces	2 355 1212 01
Steel pipe adapters with external thread	R 3/4	3/4	2 pieces	2 355 3434 01
Steel pipe adapters with external thread	R 1/2	3/8	2 pieces	2 355 3812 01
Steel pipe adapters with internal thread	G 1/2	1/2	2 pieces	2 356 1212 01
Steel pipe adapters with internal thread	G 1/2	3/8	2 pieces	2 356 3812 01


Suitable pipe-diameters (DIN EN 10255M)

Ø Pipe	outside diam.	max.	min.	insertion depth
3/8 *	17,2 mm	17,5 mm	16,7 mm	20 mm
1/2	21,3 mm	21,8 mm	21,0 mm	23 mm
3/4	26,9 mm	27,3 mm	26,5 mm	26 mm
1	33,7 mm	34,2 mm	33,3 mm	30 mm
1 ¼	42,4 mm	42,9 mm	42,0 mm	37 mm
1 ½	48,3 mm	48,8 mm	47,9 mm	48 mm

* Only for heating systems


DRINKING WATER

- // Steel pipe adapters
- // Compression fittings
- // Connectors and nipples

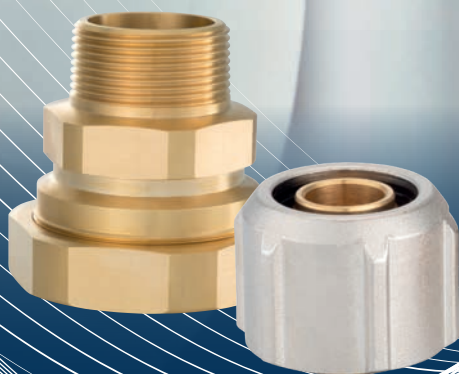

DRINKING WATER

Drinking water Steel pipe adapters with external thread



INFO

- // Certified acc. DVGW cold water, Reg.No. DW-8511CU0182
- // Fast and dirt-free assembly
- // No welding and no thread cutting necessary
- // High pressure and temperature resistance
- // Flush-mounted use according to DIN
- // For steel pipes (DIN EN 10255 M/H, DIN EN 10220-1, DIN EN 10240)

TECHNICAL DATA

Material	Brass blank
Material thrust ring	Brass blank
Material moulded seal	EPDM
Material retaining claw	Stainless steel
Max. operating pressure	10 bar
Max. operating temperature	120 °C
Max. operating temperature	95 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
R 1/2	1/2	39.5	45	16.8	27	36	2755 1212 00
R 3/4	3/4	50	50	19	34	45	2755 3434 00
R 1	1	61	56	22	41	55	2755 1010 00
R 1 1/4	1 1/4	71	69	25	50	65	2755 5454 00
R 1 1/2	1 1/2	85	80	25	60	80	2755 6464 00




to the assembly instruction



to the product video





INFO

- // Set consists of 2 compression fittings
- // Preassembled and fixed
- // Clamping range 15mm
- // For copper, precision steel or (stainless) steel pipes with a wall thickness ≥ 1 mm (according to DIN EN 1057, DIN EN 10305-2 and DIN EN 10312)
- // Low tightening torque (easy mobility)
- // Suitable for district heating
- // EPDM sealing element
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass / Coated brass
Material moulded seal	EPDM
Material clamping ring	Brass blank
Max. operating pressure	10 bar
Max. operating temperature	120 °C
Max. operating temperature	95 °C

AG1	AG2	B mm	H mm	SW1 mm	Colour	Item-No
G 3/4	15 mm	33.2	20.5	30	nickel-plated	2 855 0015 01
G 3/4	15 mm	33.2	20.5	30	chrome	2 855 0015 02
G 3/4	15 mm	33.2	20.5	30	white	2 855 0015 90



to the assembly instruction




to the product video



DRINKING WATER



Compression fittings MKV-M



INFO

- // Multi-range compression fitting
- // Set consists of 2 compression fittings
- // For copper, precision steel or (stainless) steel pipes with a wall thickness ≥ 1 mm (according to DIN EN 1057, DIN EN 10305-2 and DIN EN 10312)
- // EPDM sealing element
- // Eurocone compatible

TECHNICAL DATA



Material	Nickel-plated brass
Material clamping ring	Brass blank
Material moulded seal	EPDM
Tightening torque	40 Nm
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	B mm	H mm	SW1 mm	Item-No
G 3/4	10 – 12 mm	33.2	22	30	2 855 0001 01
G 3/4	13 – 15 mm	33.2	22	30	2 855 0002 01
G 3/4	16 – 18 mm	33.2	22	30	2 855 0003 01



to the assembly instruction





INFO

- // Set consists of 2 compression fittings
- // For plastic or metal composite pipes
- // With integrated plastic clamp insert
- // With support bushings
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material clamping ring	PA
Material moulded seal	EPDM
Material support sleeve	Brass blank
Tightening torque	40 Nm
Max. operating pressure	10 bar
Max. operating temperature	120 °C
Max. operating temperature	95 °C

AG1	AG2	B mm	H mm	SW1 mm	Item-No
G 3/4	12 x 2 mm	33.2	24.5	30	2 862 1202 01
G 3/4	14 x 2 mm	33.2	24.5	30	2 862 1402 01
G 3/4	16 x 1.8 mm	33.2	25	30	2 862 1618 01
G 3/4	16 x 2 mm	33.2	25	30	2 862 1602 01
G 3/4	16 x 2.25 mm	33.2	25	30	2 862 1622 01
G 3/4	17 x 2 mm	33.2	25	30	2 862 1702 01
G 3/4	17 x 2.5 mm	33.2	25	30	2 862 1725 01
G 3/4	18 x 2 mm	33.2	25	30	2 862 1802 01
G 3/4	20 x 2 mm	33.2	25	30	2 862 2002 01
G 3/4	20 x 2.5 mm	33.2	25	30	2 862 2025 01
G 3/4	20 x 2.8 mm	33.2	25	30	2 862 2028 01
G 3/4	20 x 2.9 mm	33.2	25	30	2 862 2029 01



to the assembly instruction



The right solution for every pipe

Good news for all modernisers and renovators: HUMMEL offers compression fittings for all common pipe types on the market. Gone are the days when tradesmen had to search for suitable connection solutions.

28 renovation sets offer solutions for more than 70 different plastic and metal composite pipes. These are almost all pipe types on the market. These sets are especially aimed at the needs in renovation. The old pipes can be pre-treated with a special calibration tool. This creates the conditions for a perfect and safe connection solution. One set consists of 10 fittings and one calibration tool.

HUMMEL compression fittings make renovation easier:

- // For heating and drinking water systems
- // Simple, dirt-free installation without special tools
- // Space-saving installation especially for difficult environments
- // Suitable solutions also for special sizes






Set-No	AG1	AG2	Item-No
1	G 3/4	9.9 x 1.1 mm / 10 x 1.3 mm / 10.1 x 1.1 mm / 12 x 2.25 mm	2 862 0001 01
2	G 3/4	11.6 x 1.8 mm / 12 x 1.8 mm / 12 x 2 mm / 13 x 2.5 mm	2 862 0002 01
3	G 3/4	11.6 x 1.5 mm / 12 x 1.6 mm / 12 x 1.7 mm	2 862 0003 01
4	G 3/4	14 x 2.6 mm	2 862 0004 01
5	G 3/4	12 x 1.4 mm / 12 x 1.5 mm	2 862 0005 01
6	G 3/4	14 x 2.5 mm	2 862 0006 01
7	G 3/4	12 x 1.1 mm / 12 x 1.2 mm / 12 x 1.25 mm / 12 x 1.3 mm	2 862 0007 01
8	G 3/4	14 x 2.25 mm	2 862 0008 01
9	G 3/4	15 x 2.6 mm / 16 x 3.3 mm	2 862 0009 01
10	G 3/4	12 x 1 mm	2 862 0010 01
11	G 3/4	13 x 1.5 mm / 14 x 2 mm	2 862 0011 01
12	G 3/4	15 x 2.5 mm	2 862 0012 01
13	G 3/4	14 x 1.6 mm / 14 x 1.75 mm	2 862 0013 01
14	G 3/4	16 x 2.7 mm / 16 x 2.75 mm	2 862 0014 01
15	G 3/4	14 x 1.5 mm	2 862 0015 01
16	G 3/4	15 x 2.0 mm / 16.2 x 2.6 mm	2 862 0016 01
17	G 3/4	15 x 1.8 mm / 15.5 x 2 mm / 16 x 2.2 mm / 16 x 2.25 mm / 17 x 2.75 mm / 17 x 2.8 mm	2 862 0017 01
18	G 3/4	14 x 1 mm	2 862 0018 01
19	G 3/4	15 x 1.5 mm / 15.6 x 1.8 mm / 16 x 2 mm / 16.2 x 2.1 mm / 16.7 x 2.4 mm / 17 x 2.5 mm	2 862 0019 01
20	G 3/4	15 x 1.2 mm / 16 x 1.75 mm / 16 x 1.8 mm / 17 x 2.2 mm	2 862 0020 01
21	G 3/4	18 x 2.75 mm	2 862 0021 01
22	G 3/4	15 x 1 mm / 16 x 1.5 mm / 17 x 2 mm	2 862 0022 01
23	G 3/4	18 x 2.5 mm	2 862 0023 01
24	G 3/4	18 x 2 mm / 20 x 2.9 mm	2 862 0024 01
25	G 3/4	18 x 1.75 mm / 20 x 2.8 mm	2 862 0025 01
26	G 3/4	18 x 1.5 mm / 19 x 2 mm / 20 x 2.5 mm / 20.2 x 2.6 mm	2 862 0026 01
27	G 3/4	18 x 1.25 mm / 20 x 2.25 mm / 20 x 2.3 mm	2 862 0027 01
28	G 3/4	18 x 1 mm / 18 x 1.2 mm / 20 x 2 mm	2 862 0028 01

DRINKING WATER

Connector nipple



INFO


- // For compression fittings
- // For manifolds and fittings
- // O-ring sealing
- // Flush-mounted use according to DIN
- // Eurocone compatible

TECHNICAL DATA

Material	Brass blank
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C
Max. operating temperature	95 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 3/4	G 1/2	29	29	26	11	9	26	2 554 1234 00







INFO

- // For compression fittings
- // For manifolds and fittings
- // Transition of pressing systems
- // Flush-mounted use according to DIN
- // Eurocone compatible


TECHNICAL DATA

Material	Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 3/4	G 3/4	29	29	28	11	11	26	2 554 3434 00

DRINKING WATER



Coupling nipple



INFO


- // For compression fittings
- // Connecting pipe systems
- // Flush-mounted use according to DIN
- // Eurocone compatible

TECHNICAL DATA

Material	Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 3/4	G 3/4	29	29	28	11	11	26	2 253 3434 00







INFO

- // For compression fittings
- // Flush-mounted use according to DIN
- // Eurocone compatible


TECHNICAL DATA

Material	Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	AG3	L mm	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/4	G 3/4	G 3/4	54	26	40	9	22	2 253 3495 00


CONNECTION TECHNOLOGY

- // Steel pipe adapters
- // Compression fittings
- // Connectors and nipples
- // Reductions
- // Coupling angles

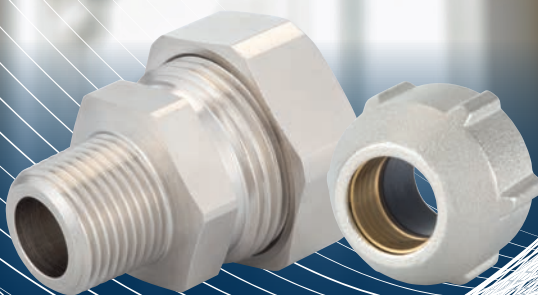

CONNECTION TECHNOLOGY

Steel pipe adapters with Eurocone internal thread



INFO

- // Fast and dirt-free assembly
- // No welding and no thread cutting necessary
- // Ideal for renovations and refurbishments
- // High pressure and temperature resistance
- // Flush-mounted use according to DIN
- // For steel pipes (DIN EN 10255 M/H, DIN EN 10220-1, DIN EN 10240)
- // For boiling pipes (DIN EN 10216-1, DIN EN 10217-1)
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material thrust ring	Brass blank
Material moulded seal	EPDM
Material retaining claw	Stainless steel
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 3/4	3/8	33	34	7	30	30	2 353 3834 01
G 3/4	1/2	39.5	36	7	30	36	2 353 1234 01



to the assembly instruction



to the product video



INFO

- // Fast and dirt-free assembly
- // No welding and no thread cutting necessary
- // Ideal for renovations and refurbishments
- // High pressure and temperature resistance
- // Flush-mounted use according to DIN
- // For steel pipes (DIN EN 10255 M/H, DIN EN 10220-1, DIN EN 10240)
- // For boiling pipes (DIN EN 10216-1, DIN EN 10217-1)
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material thrust ring	Brass blank
Material moulded seal	EPDM
Material retaining claw	Stainless steel
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 3/4	3/8	33	34	9.5	27	30	2 354 3834 01
G 3/4	1/2	39.5	36	9.5	27	36	2 354 1234 01
G 3/4	3/4	50	41	9.5	34	45	2 354 3434 01




to the assembly instruction



to the product video

CONNECTION TECHNOLOGY

Steel pipe adapters with internal thread



INFO

- // Fast and dirt-free assembly
- // No welding and no thread cutting necessary
- // Ideal for renovations and refurbishments
- // High pressure and temperature resistance
- // Flush-mounted use according to DIN
- // For steel pipes (DIN EN 10255 M/H, DIN EN 10220-1, DIN EN 10240)
- // For boiling pipes (DIN EN 10216-1, DIN EN 10217-1)

TECHNICAL DATA

Material	Nickel-plated brass
Material thrust ring	Brass blank
Material moulded seal	EPDM
Material retaining claw	Stainless steel
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 1/2	3/8	33	34	10	27	30	2 356 381 2 01
G 1/2	1/2	39.5	36	10	27	36	2 356 121 2 01



to the assembly instruction



to the product video



INFO

- // Fast and dirt-free assembly
- // No welding and no thread cutting necessary
- // Ideal for renovations and refurbishments
- // High pressure and temperature resistance
- // Flush-mounted use according to DIN
- // For steel pipes (DIN EN 10255 M/H, DIN EN 10220-1, DIN EN 10240)
- // For boiling pipes (DIN EN 10216-1, DIN EN 10217-1)

TECHNICAL DATA

Material	Nickel-plated brass
Material thrust ring	Brass blank
Material moulded seal	EPDM
Material retaining claw	Stainless steel
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
R 3/8	3/8	33	39	13.2	24	30	2 355 3838 01
R 1/2	3/8	33	42	16.8	24	30	2 355 3812 01
R 1/2	1/2	39.5	45	16.8	27	36	2 355 1212 01
R 3/4	3/4	50	50	19	34	45	2 355 3434 01
R 1	1	61	56	22	41	55	2 355 1010 01
R 1 1/4	1 1/4	71	69	25	50	65	2 355 5454 01
R 1 1/2	1 1/2	85	80	25	60	80	2 355 6464 01




to the assembly instruction



to the product video

CONNECTION TECHNOLOGY

Drinking water Steel pipe adapters with external thread



INFO

- // Certified acc. DVGW cold water, Reg.No. DW-8511CU0182
- // Fast and dirt-free assembly
- // No welding and no thread cutting necessary
- // High pressure and temperature resistance
- // Flush-mounted use according to DIN
- // For steel pipes (DIN EN 10255 M/H, DIN EN 10220-1, DIN EN 10240)

TECHNICAL DATA

Material	Brass blank
Material thrust ring	Brass blank
Material moulded seal	EPDM
Material retaining claw	Stainless steel
Max. operating pressure	10 bar
Max. operating temperature	120 °C
Max. operating temperature	95 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
R 1/2	1/2	39.5	45	16.8	27	36	2755 1212 00
R 3/4	3/4	50	50	19	34	45	2755 3434 00
R 1	1	61	56	22	41	55	2755 1010 00
R 1 1/4	1 1/4	71	69	25	50	65	2755 5454 00
R 1 1/2	1 1/2	85	80	25	60	80	2755 6464 00




to the assembly instruction



to the product video







INFO

- // Set consists of 2 compression fittings
- // Preassembled and fixed
- // Clamping range 15mm
- // For copper, precision steel or (stainless) steel pipes with a wall thickness ≥ 1 mm (according to DIN EN 1057, DIN EN 10305-2 and DIN EN 10312)
- // Low tightening torque (easy mobility)
- // Suitable for district heating
- // EPDM sealing element
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass / Coated brass
Material moulded seal	EPDM
Material clamping ring	Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	B mm	H mm	SW1 mm	Colour	Item-No
G 3/4	15 mm	33.2	20.5	30	nickel-plated	2 855 0015 01
G 3/4	15 mm	33.2	20.5	30	chrome	2 855 0015 02
G 3/4	15 mm	33.2	20.5	30	white	2 855 0015 90



to the assembly instruction




to the product video



CONNECTION TECHNOLOGY



Compression fittings MKV-M



INFO

- // Multi-range compression fitting
- // Set consists of 2 compression fittings
- // For copper, precision steel or (stainless) steel pipes with a wall thickness ≥ 1 mm (according to DIN EN 1057, DIN EN 10305-2 and DIN EN 10312)
- // EPDM sealing element
- // Eurocone compatible

TECHNICAL DATA



Material	Nickel-plated brass
Material clamping ring	Brass blank
Material moulded seal	EPDM
Tightening torque	40 Nm
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	B mm	H mm	SW1 mm	Item-No
G 3/4	10 – 12 mm	33.2	22	30	2 855 0001 01
G 3/4	13 – 15 mm	33.2	22	30	2 855 0002 01
G 3/4	16 – 18 mm	33.2	22	30	2 855 0003 01



to the assembly instruction





INFO

- // Set consists of 2 compression fittings
- // For plastic or metal composite pipes
- // With integrated plastic clamp insert
- // With support bushings
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material clamping ring	PA
Material moulded seal	EPDM
Material support sleeve	Brass blank
Tightening torque	40 Nm
Max. operating pressure	10 bar
Max. operating temperature	120 °C
Max. operating temperature	95 °C

AG1	AG2	B mm	H mm	SW1 mm	Item-No
G 3/4	12 x 2 mm	33.2	24.5	30	2 862 1202 01
G 3/4	14 x 2 mm	33.2	24.5	30	2 862 1402 01
G 3/4	16 x 1.8 mm	33.2	25	30	2 862 1618 01
G 3/4	16 x 2 mm	33.2	25	30	2 862 1602 01
G 3/4	16 x 2.25 mm	33.2	25	30	2 862 1622 01
G 3/4	17 x 2 mm	33.2	25	30	2 862 1702 01
G 3/4	17 x 2.5 mm	33.2	25	30	2 862 1725 01
G 3/4	18 x 2 mm	33.2	25	30	2 862 1802 01
G 3/4	20 x 2 mm	33.2	25	30	2 862 2002 01
G 3/4	20 x 2.5 mm	33.2	25	30	2 862 2025 01
G 3/4	20 x 2.8 mm	33.2	25	30	2 862 2028 01
G 3/4	20 x 2.9 mm	33.2	25	30	2 862 2029 01



to the assembly instruction



The right solution for every pipe

Good news for all modernisers and renovators: HUMMEL offers compression fittings for all common pipe types on the market. Gone are the days when tradesmen had to search for suitable connection solutions.

28 renovation sets offer solutions for more than 70 different plastic and metal composite pipes. These are almost all pipe types on the market. These sets are especially aimed at the needs in renovation. The old pipes can be pre-treated with a special calibration tool. This creates the conditions for a perfect and safe connection solution. One set consists of 10 fittings and one calibration tool.

HUMMEL compression fittings make renovation easier:

- // For heating and drinking water systems
- // Simple, dirt-free installation without special tools
- // Space-saving installation especially for difficult environments
- // Suitable solutions also for special sizes






Set-No	AG1	AG2	Item-No
1	G 3/4	9.9 x 1.1 mm / 10 x 1.3 mm / 10.1 x 1.1 mm / 12 x 2.25 mm	2862 0001 01
2	G 3/4	11.6 x 1.8 mm / 12 x 1.8 mm / 12 x 2 mm / 13 x 2.5 mm	2862 0002 01
3	G 3/4	11.6 x 1.5 mm / 12 x 1.6 mm / 12 x 1.7 mm	2862 0003 01
4	G 3/4	14 x 2.6 mm	2862 0004 01
5	G 3/4	12 x 1.4 mm / 12 x 1.5 mm	2862 0005 01
6	G 3/4	14 x 2.5 mm	2862 0006 01
7	G 3/4	12 x 1.1 mm / 12 x 1.2 mm / 12 x 1.25 mm / 12 x 1.3 mm	2862 0007 01
8	G 3/4	14 x 2.25 mm	2862 0008 01
9	G 3/4	15 x 2.6 mm / 16 x 3.3 mm	2862 0009 01
10	G 3/4	12 x 1 mm	2862 0010 01
11	G 3/4	13 x 1.5 mm / 14 x 2 mm	2862 0011 01
12	G 3/4	15 x 2.5 mm	2862 0012 01
13	G 3/4	14 x 1.6 mm / 14 x 1.75 mm	2862 0013 01
14	G 3/4	16 x 2.7 mm / 16 x 2.75 mm	2862 0014 01
15	G 3/4	14 x 1.5 mm	2862 0015 01
16	G 3/4	15 x 2.0 mm / 16.2 x 2.6 mm	2862 0016 01
17	G 3/4	15 x 1.8 mm / 15.5 x 2 mm / 16 x 2.2 mm / 16 x 2.25 mm / 17 x 2.75 mm / 17 x 2.8 mm	2862 0017 01
18	G 3/4	14 x 1 mm	2862 0018 01
19	G 3/4	15 x 1.5 mm / 15.6 x 1.8 mm / 16 x 2 mm / 16.2 x 2.1 mm / 16.7 x 2.4 mm / 17 x 2.5 mm	2862 0019 01
20	G 3/4	15 x 1.2 mm / 16 x 1.75 mm / 16 x 1.8 mm / 17 x 2.2 mm	2862 0020 01
21	G 3/4	18 x 2.75 mm	2862 0021 01
22	G 3/4	15 x 1 mm / 16 x 1.5 mm / 17 x 2 mm	2862 0022 01
23	G 3/4	18 x 2.5 mm	2862 0023 01
24	G 3/4	18 x 2 mm / 20 x 2.9 mm	2862 0024 01
25	G 3/4	18 x 1.75 mm / 20 x 2.8 mm	2862 0025 01
26	G 3/4	18 x 1.5 mm / 19 x 2 mm / 20 x 2.5 mm / 20.2 x 2.6 mm	2862 0026 01
27	G 3/4	18 x 1.25 mm / 20 x 2.25 mm / 20 x 2.3 mm	2862 0027 01
28	G 3/4	18 x 1 mm / 18 x 1.2 mm / 20 x 2 mm	2862 0028 01

CONNECTION TECHNOLOGY



Connector nipple




INFO

- // For compression fittings
- // For manifolds and fittings
- // O-ring sealing
- // Flush-mounted use according to DIN
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass / Brass blank
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C



AG1	AG2	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Material	Item-No
G 3/4	G 1/2	29	29	26	11	9	26	Brass blank	2 554 1234 00
G 3/4	G 1/2	29	29	26	11	9	26	Nickel-plated brass	2 554 1234 01



INFO

- // For compression fittings
- // For manifolds and fittings
- // Transition of pressing systems
- // Flush-mounted use according to DIN
- // Eurocone compatible


TECHNICAL DATA

Material	Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 3/4	G 3/4	29	29	28	11	11	26	2 554 3434 00

CONNECTION TECHNOLOGY



Coupling nipple





INFO

- // For compression fittings
- // Connecting pipe systems
- // Flush-mounted use according to DIN
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass / Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Material	Item-No
G 3/4	G 3/4	29	29	28	11	11	26	Brass blank	2 253 3434 00
G 3/4	G 3/4	29	29	28	11	11	26	Nickel-plated brass	2 253 3434 01



left: 2 254 1244 01 | right: 2 254 5834 01

INFO

- // For compression fittings
- // Female thread with seal
- // Eurocone compatible



TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	Vulcanised fibre / EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/2	G 3/4	30	28	13	27	2 254 1244 01
G 5/8	G 3/4	29	21	11	26	2 254 5834 01

CONNECTION TECHNOLOGY

Reductions with external thread



left: 2 549 3412 01 | right: 2 554 2234 01

INFO


- // Compact transition for radiator fittings
- // Including sealing

* Eurocone compatible
** flat sealing

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/4	M22 x 1.5	29	15	11	26	2 554 2234 01 *
G 3/4	G 1/2	29	15	11	26	2 549 3412 01 **



INFO

- // For manifolds and fittings
- // Male thread with o-ring seal
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 3/4	G 1/2	33.5	33.5	25.5	9	30	12	2 908 3412 01

CONNECTION TECHNOLOGY



Coupling T piece




INFO

- // For compression fittings
- // Flush-mounted use according to DIN
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass / Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	AG3	L mm	B mm	GL1 mm	SW1 mm	Material	Item-No
G 3/4	G 3/4	G 3/4	54	26	9	22	Brass blank	2 253 3495 00
G 3/4	G 3/4	G 3/4	54	26	9	22	Nickel-plated brass	2 253 3495 01



INFO

- // For compression fittings
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	A1 mm	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 1/2	G 3/4	27	40	26.4	40	9	9	22	2 253 3492 01
G 3/4	G 3/4	27	40	26.4	40	9	9	22	2 253 3490 01

CONNECTION TECHNOLOGY

Coupling angle with union nut



INFO

- // For compression fittings
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	A1 mm	L mm	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/4	G 3/4	35.1	48	26	41	12.5	30	2 552 1234 01


RADIATOR CONNECTIONS

- // Diverters
- // Special connections
- // Flexible connections
- // Connection fittings
- // Thermostatic valves
- // Threaded-joint radiator returns
- // Thermostatic heads
- // Design fittings



RADIATOR CONNECTIONS

Diverters straight type



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // For interchanged flow and return pipes
- // Without shutoff
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	AM mm	L mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	50	85.5	51	10	30	Cone	2 257 0002 01
G 3/4	G 3/4	50	85.5	51	10	30	Nipple	2 257 0003 01



to the assembly instruction



to the product video



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For one-pipe and two-pipe systems
- // For interchanged flow and return pipes
- // With lateral spindle shut-off
- // With lateral bypass spindle
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	AM mm	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 3/4	G 3/4	50	112.9	61.1	8	30	17	Cone	2 257 0023 01
G 3/4	G 3/4	50	112.9	61.1	8	30	17	Nipple	2 257 0024 01





to the assembly instruction



to the product video

RADIATOR CONNECTIONS

Diverters corner type lockable (one/two pipe)



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For one-pipe and two-pipe systems
- // For interchanged flow and return pipes
- // With lateral spindle shut-off
- // With lateral bypass spindle
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	AM mm	A1 mm	A2 mm	AT4	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 3/4	G 3/4	50	39	35.4	Bypass	122.1	56.6	11	30	17	Cone	2 257 0026 01
G 3/4	G 3/4	50	39	35.4	Bypass	122.1	56.6	11	30	17	Nipple	2 257 0027 01



to the assembly instruction



to the product video



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // For interchanged flow and return pipes
- // With lateral spindle shut-off
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	AM mm	L mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	50	103	51	10	30	Cone	2 257 0004 01
G 3/4	G 3/4	50	103	51	10	30	Nipple	2 257 0005 01





to the assembly instruction



to the product video

RADIATOR CONNECTIONS

Diverters corner type lockable



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // For interchanged flow and return pipes
- // With lateral spindle shut-off
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	A1 mm	A2 mm	AM mm	L mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	27	40	50	112.7	53.5	10	30	Cone	2 257 0010 01
G 3/4	G 3/4	27	40	50	112.7	53.5	10	30	Nipple	2 257 0011 01



to the assembly instruction



to the product video



INFO

- // For the adjustment of axial pipe distances
- // Conical sealing
- // Eurocone compatible



TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	A1 mm	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/2	G 3/4	7.5	33.5	32.6	12	30	2 556 3412 01
G 3/4	G 3/4	7.5	34	32.6	10	30	2 556 3434 01
M22 x 1.5	G 3/4	7.5	33.5	32.6	10	30	2 556 3422 01

RADIATOR CONNECTIONS

Cone adapter




INFO

- // Connection between return screw fitting and valve radiator
- // Conical sealing
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	L mm	B mm	H mm	SW1 mm	SW2 mm	Item-No
G 3/4	G 3/4	33.5	33.5	32	30	30	2 155 3434 01



INFO

- // Version cone & nipple: 1 cone insert & 1 x (G 1/2 x G 3/4)
- // Version cone: 1 cone insert
- // Version nipple: 1 x (G 1/2 x G 3/4)
- // For length compensation of valves and fittings
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	Lv mm	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 3/4	G 3/4	37.1 – 53	33.5	53	10	24	30	-	2 559 3434 01
G 3/4	G 3/4	37.1 – 53	33.5	53	10	24	30	Nipple	2 559 3435 01
G 3/4	G 3/4	37.1 – 53	33.5	53	10	24	30	Cone	2 559 3436 01
G 3/4	G 3/4	37.1 – 53	33.5	53	10	24	30	Cone & nipple	2 859 3435 01



to the assembly instruction

RADIATOR CONNECTIONS

Telescopic connections



INFO

- // To compensate for distances between valve and radiator
- // O-ring sealing


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	Lv mm	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/8	1/2	31 – 47	19.8	47	10	5	2 559 3800 01
G 1/2	3/4	31 – 47	23.9	47	10	8	2 559 1200 01
G 3/4	1	31 – 47	29	47	10	10	2 559 3400 01



to the assembly instruction



INFO

- // Adapter with G 3/4 union nut
- // O-ring sealing
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 3/8	G 3/4	33.5	33.5	40.55	9.8	24	30	2 559 3438 01
G 1/2	G 3/4	33.5	33.5	37.2	10	24	30	2 559 3412 01

RADIATOR CONNECTIONS

Extension piece




INFO

- // Extension of fittings, valves and return fittings
- // For the adjustment of horizontal and vertical pipe distances
- // O-ring sealing
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/4	G 3/4	33	33	30	10	30	2 555 3434 01



INFO

- // Version nipple: 1 x (G 1/2 x G 3/4)
- // Small distributors for heating circuits, manifolds and control boxes
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	AM mm	L mm	B mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	40	66	33.5	58	7.5	30	-	2 257 0008 01
G 3/4	G 3/4	40	66	33.5	58	7.55	30	Nipple	2 257 0009 01

RADIATOR CONNECTIONS

Mounting bridge



INFO

- // To span the flow and return pipes
- // With HUMMEL air bleeder valve
- // Eurocone compatible



TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	AM mm	L mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/4	G 1/4	50	96.4	28.5	8.4	15	2 257 0001 01



to the assembly instruction



left: 2 823 3434 01 | right: 2 830 3434 01

INFO

- // Union nut G 3/4
- // Stainless steel corrugated tube extensible
- // Flat sealing version
- // For the replacement of boilers, instantaneous water heaters, storage tanks and wall-mounted appliances

TECHNICAL DATA

Material	Stainless steel
Material moulded seal	AFM
Material union nut	Nickel-plated brass
Max. operating pressure	6 bar
Max. operating temperature	95 °C


AG1	AG2	Lv mm	H mm	SW1 mm	SW2 mm	SW3 mm	Flow rate l/h	Item-No
R 3/4	G 3/4	95 – 200	33.5	27	30	21	2200	2 823 3434 01
G 3/4	G 3/4	95 – 200	33.5	30	30	21	2200	2 830 3434 01



to the product video

RADIATOR CONNECTIONS

Flexible radiator connections with reduction

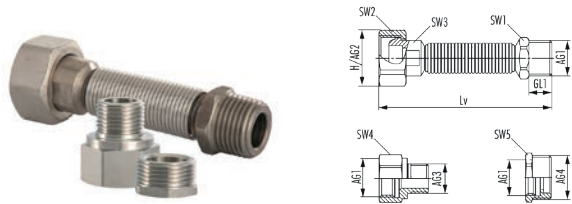

INFO

- // Stainless steel corrugated tube extensible
- // Incl. Reduction G 1/2 x G 3/8 and G 3/4 x G 1/2
- // Eurocone compatible


TECHNICAL DATA

Material	Stainless steel
Material moulded seal	EPDM
Material reduction	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	AG3	AG4	Lv mm	H mm	SW1 mm	SW2 mm	SW3 mm	Item-No
G 1/2	G 3/4	G 3/8	G 3/4	65 – 95	33.5	22	30	19	2826 1238 341
G 1/2	G 3/4	G 3/8	G 3/4	93 – 143	33.5	22	30	19	2827 1238 341
G 1/2	G 3/4	G 3/8	G 3/4	115 – 210	33.5	22	30	19	2828 1238 341
G 1/2	G 3/4	G 3/8	G 3/4	190 – 410	33.5	22	30	19	2829 1238 341



to the product video



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Flat sealing version
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C



AG1	AG2	AM mm	L mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	50	83.5	43.5	8	30	Nipple	2 249 3435 01
G 3/4	G 3/4	50	83.5	43.5	8	30	Cone	2 249 3436 01



to the assembly instruction

RADIATOR CONNECTIONS

Two-pipe terminal blocks corner type



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Flat sealing version
- // Ball shut-off valve
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	A1 mm	AM mm	L mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	30	50	83.5	35.6	10.5	30	Nipple	2 249 8435 01
G 3/4	G 3/4	30	50	83.5	35.6	10.5	30	Cone	2 249 8436 01



to the assembly instruction



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Flat sealing version
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	AG3	AM mm	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 3/4	G 3/4	G 1/4	50	90.2	52.1	8	30	6	Nipple	2 218 3435 01
G 3/4	G 3/4	G 1/4	50	90.2	52.1	8	30	6	Cone	2 218 3436 01



to the assembly instruction

RADIATOR CONNECTIONS

Two-pipe terminal blocks corner type drainable

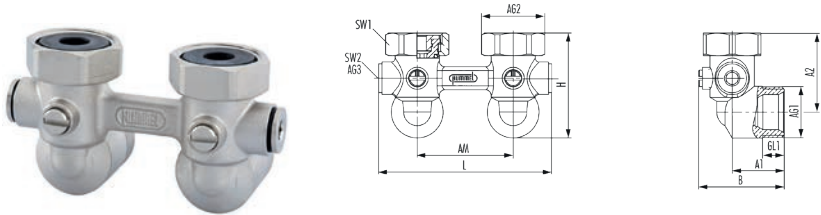

INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Flat sealing version
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA


Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	AG3	AM mm	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 3/4	G 3/4	G 1/4	50	90.2	53.2	11	30	6	Nipple	2 218 8435 01
G 3/4	G 3/4	G 1/4	50	90.2	53.2	11	30	6	Cone	2 218 8436 01



to the assembly instruction

Two-pipe terminal blocks straight type (quadruple connection)



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Flat sealing version
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	A1 mm	AM mm	L mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	40	50	161	70.1	8	30	Cone	2 257 0021 01
G 3/4	G 3/4	40	50	161	70.1	8	30	Nipple	2 257 0022 01



to the assembly instruction

RADIATOR CONNECTIONS

One-pipe terminal blocks straight type



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For single pipe systems
- // Compact design
- // With lateral bypass spindle
- // Flat sealing version
- // Ball shut-off valve
- // Eurocone compatible



TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	33.5	62.1	8	30	Nipple	2 248 3435 01
G 3/4	G 3/4	33.5	62.1	8	30	Cone	2 248 3436 01



to the assembly instruction



INFO

- // Version cone: 2 cone inserts
- // Version nipple: 2 x (G 1/2 x G 3/4)
- // For single pipe systems
- // Compact design
- // With lateral bypass spindle
- // Flat sealing version
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	A1 mm	A2 mm	B mm	H mm	GL1 mm	SW1 mm	Version	Item-No
G 3/4	G 3/4	27	41.6	43.8	53.2	12	30	Nipple	2 248 8435 01
G 3/4	G 3/4	27	41.6	43.8	53.2	12	30	Cone	2 248 8436 01



to the assembly instruction

RADIATOR CONNECTIONS

Single-connection fittings straight type



INFO

- // Version nipple: 1 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Conical sealing
- // Ball shut-off valve
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 3/4	G 3/4	33.5	33.5	50.6	9.2	30	23	-	2 256 3434 01
G 3/4	G 3/4	33.5	33.5	50.6	9.2	30	23	Nipple	2 256 3435 01



to the assembly instruction



INFO

- // Version nipple: 1 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Conical sealing
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C


AG1	AG2	A1 mm	A2 mm	L mm	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 3/4	G 3/4	27.6	30.4	33.5	46.8	40.7	10.4	30	23	-	2 256 8434 01
G 3/4	G 3/4	27.6	30.4	33.5	46.8	40.7	10.4	30	23	Nipple	2 256 8435 01



to the assembly instruction

RADIATOR CONNECTIONS

Single-connection fittings straight type with internal thread



INFO

- // Version nipple: 1 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Conical sealing
- // Ball shut-off valve
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 1/2	G 3/4	33.5	33.5	50.6	10	30	23	-	2 256 1234 01
G 1/2	G 3/4	33.5	33.5	50.6	10	30	23	Nipple	2 256 1235 01



to the assembly instruction



INFO

- // Version nipple: 1 x (G 1/2 x G 3/4)
- // For two-pipe systems
- // Compact design
- // Conical sealing
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	120 °C



AG1	AG2	A1 mm	A2 mm	L mm	B mm	H mm	GL1 mm	SW1 mm	SW2 mm	Version	Item-No
G 1/2	G 3/4	27.6	30.4	33.5	46.8	40.4	9	30	23	-	2 256 841 2 01
G 1/2	G 3/4	27.6	30.4	33.5	46.8	40.4	9	30	23	Nipple	2 256 841 3 01



to the assembly instruction

RADIATOR CONNECTIONS

Quadro valve terminal blocks



INFO

- // Version nipple: 2 x (G 1/2 x G 3/4)
- // Valve manifold with thermostatic head and cover cap
- // For two-pipe systems in corner or through form
- // For pipe connection to the wall or perpendicular to the floor
- // The thermostatic head can be mounted on the left or right side
- // Thermostatic valve bonnet and shut-off bonnet can be exchanged
- // The flow must always be connected on the side of the thermostat sensor


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5

AG1	AG2	AG3	AM mm	A1 mm	A2 mm	L mm	H mm	Colour	Version	Item-No
G 3/4	G 1/2	M30 x 1,5	50	26	51	178	80	chrome	Nipple	2 219 841 2 02
G 3/4	G 1/2	M30 x 1,5	50	26	51	178	80	white	Nipple	2 219 841 2 90
G 3/4	G 1/2	M30 x 1,5	50	26	51	178	80	black	Nipple	2 219 841 2 05



to the assembly instruction



INFO

- // Single connection
- // With pre-adjustable thermostatic valve insert and protective cap
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5


AG1	AG2	AG3	A1 mm	L mm	H mm	GL1 mm	GL2 mm	SW1 mm	SW2 mm	SW3 mm	Item-No
G 3/4	G 1/2	G 3/4	56.7	80	54	7.5	15	30	22	22	2 914 1234 01



to the assembly instruction

RADIATOR CONNECTIONS

Thermostatic valve corner type (Eurocone)



INFO

- // Single connection
- // With pre-adjustable thermostatic valve insert and protective cap
- // Eurocone compatible


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5

AG1	AG2	AG3	A1 mm	L mm	H mm	GL1 mm	GL2 mm	SW1 mm	SW2 mm	SW3 mm	Item-No
G 3/4	G 1/2	G 3/4	30	73.2	65.5	7.5	15	30	22	22	2 904 1234 01



to the assembly instruction



INFO

- // Single connection
- // With pre-adjustable thermostatic valve insert and protective cap
- // Internal thread

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5


AG1	AG2	AG3	L mm	H mm	GL2 mm	SW1 mm	SW2 mm	SW3 mm	Item-No
G 3/8	G 3/8	G 5/8	75	57.5	11	27	22	22	2 914 3800 01
G 1/2	G 1/2	G 3/4	84	59	15	30	27	22	2 914 1200 01
G 3/4	G 3/4	G 1	96	71	16	38	32	22	2 914 3400 01



to the assembly instruction

RADIATOR CONNECTIONS

Thermostatic valves corner type (internal thread)



INFO

- // Single connection
- // With pre-adjustable thermostatic valve insert and protective cap
- // Internal thread

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5



AG1	AG2	AG3	A1 mm	L mm	H mm	GL2 mm	SW1 mm	SW2 mm	SW3 mm	Item-No
G 3/8	G 3/8	G 5/8	20	65.5	55.5	11	27	22	22	2 904 3800 01
G 1/2	G 1/2	G 3/4	25	69.5	60.5	15	30	27	22	2 904 1200 01
G 3/4	G 3/4	G 1	29	76.5	78	16	38	32	22	2 904 3400 01



to the assembly instruction

RADIATOR CONNECTIONS

Thermostatic valve angle corner type right



INFO

- // Single connection
- // With pre-adjustable thermostatic valve insert and protective cap
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5



AG1	AG2	AG3	A1 mm	L mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 3/4	G 1/2	G 3/4	56.7	53.5	73.2	7.5	15	30	2 922 1234 01



to the assembly instruction

RADIATOR CONNECTIONS

Thermostatic valve angle corner type left



INFO

- // Single connection
- // With pre-adjustable thermostatic valve insert and protective cap
- // Eurocone compatible

TECHNICAL DATA


Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5

AG1	AG2	AG3	A1 mm	L mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 3/4	G 1/2	G 3/4	56.7	53.5	73.2	7.5	15	30	2 923 1234 01



to the assembly instruction

Threaded-joint radiator return straight type (Eurocone)



INFO

- // Single connection
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C


AG1	AG2	AG3	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	SW2 mm	Item-No
G 3/4	G 1/2	G 3/4	33.5	33.5	79.7	9.2	15	30	23	2 920 1234 01



to the assembly instruction

RADIATOR CONNECTIONS

Threaded-joint radiator return corner type (Eurocone)



INFO

- // Single connection
- // Ball shut-off valve
- // Eurocone compatible

TECHNICAL DATA


Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	AG2	AG3	A1 mm	A2 mm	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	SW2 mm	Item-No
G 3/4	G 1/2	G 3/4	56.7	30	46.8	33.5	69.8	10.5	15	30	23	2 925 1234 01



to the assembly instruction

Threaded-joint radiator returns straight type (internal thread)



INFO

- // Single connection
- // Spindle shut-off
- // Adjustable rate of flow
- // Internal thread

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C


AG1	AG2	AG3	A1 mm	L mm	B mm	H mm	GL2 mm	SW1 mm	SW2 mm	Item-No
G 3/8	G 3/8	G 5/8	55	75	32	43.5	11	25	22	2 915 3800 01
G 1/2	G 1/2	G 3/4	60	84	33.5	45	15	30	26	2 915 1200 01
G 3/4	G 3/4	G 1	62	95	44	57	16	37	30	2 915 3400 01



to the assembly instruction

RADIATOR CONNECTIONS

Threaded-joint radiator returns corner type (internal thread)



INFO

- // Single connection
- // Spindle shut-off
- // Adjustable rate of flow
- // Internal thread

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C


AG1	AG2	AG3	L mm	B mm	H mm	GL2 mm	SW1 mm	SW2 mm	Item-No
G 3/8	G 3/8	G 5/8	64.5	32	41.5	11	25	22	2 905 3800 01
G 1/2	G 1/2	G 3/4	69.5	33.5	46.5	15	30	26	2 905 1200 01
G 3/4	G 3/4	G 1	82	44	64	16	37	30	2 905 3400 01



to the assembly instruction

RADIATOR CONNECTIONS

Thermostatic heads M30 x 1,5



INFO

- // Solids sensor
- // Zero setting
- // Temperature limit



TECHNICAL DATA

Material thermostatic head	ABS / PA
Material union nut	Nickel-plated brass / Coated brass
Frost protection device	Yes
Position 0	Radiator closed
Position 1-5	limited at respective temperature setting
Control range	8 – 28 °C
max. Sensor temperature	50 °C

AG1	L mm	B mm	Colour	Item-No
M30 x 1.5	76	42.5	chrome	2 907 0001 02
M30 x 1.5	76	42.5	white	2 907 0001 90
M30 x 1,5	76	42,5	black	2 907 0001 05

RADIATOR CONNECTIONS

Set 1 corner type



INFO

- // Design fitting with thermostatic head
- // For two-pipe systems
- // For pipe connection to the wall
- // Valve presettable
- // Thermostatic valve bonnet and shut-off bonnet can be exchanged
- // The thermostatic head can be mounted on the left or right side
- // The flow must always be connected on the side of the thermostat sensor


TECHNICAL DATA

Material	Brass white / Brass chrome
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	AG2	AG3	AM mm	A1 mm	A2 mm	L mm	H mm	SW1 mm	Colour	Item-No
G 3/4	G 1/2	M30 x 1.5	50	30	51.5	191	72.8	30	chrome	2 810 0381 02
G 3/4	G 1/2	M30 x 1.5	50	30	51.5	191	72.8	30	white	2 810 0381 90



to the assembly instruction



INFO

- // Design fitting with thermostatic head
- // For two-pipe systems
- // For pipe connection perpendicular to the floor
- // Valve presettable
- // Thermostatic valve bonnet and shut-off bonnet can be exchanged
- // The thermostatic head can be mounted on the left or right side
- // The flow must always be connected on the side of the thermostat sensor

TECHNICAL DATA

Material	Brass white / Brass chrome
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	90 °C



AG1	AG2	AG3	AM mm	L mm	H mm	GL1 mm	SW1 mm	Colour	Item-No
G 3/4	G 1/2	M30 x 1.5	50	191	81.4	8.2	30	chrome	2 810 0382 02
G 3/4	G 1/2	M30 x 1.5	50	191	81.4	8.2	30	white	2 810 0382 90



to the assembly instruction

RADIATOR CONNECTIONS

Quadro valve terminal blocks



INFO

- // Version nipple: 2 x (G 1/2 x G 3/4)
- // Valve manifold with thermostatic head and cover cap
- // For two-pipe systems in corner or through form
- // For pipe connection to the wall or perpendicular to the floor
- // The thermostatic head can be mounted on the left or right side
- // Thermostatic valve bonnet and shut-off bonnet can be exchanged
- // The flow must always be connected on the side of the thermostat sensor

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM / Teflon
Max. operating pressure	10 bar
Max. operating temperature	90 °C
Thermostat connection	M30 x 1.5


AG1	AG2	AG3	AM mm	A1 mm	A2 mm	L mm	H mm	Colour	Version	Item-No
G 3/4	G 1/2	M30 x 1.5	50	26	51	178	80	chrome	Nipple	2 219 841 2 02
G 3/4	G 1/2	M30 x 1.5	50	26	51	178	80	white	Nipple	2 219 841 2 90
G 3/4	G 1/2	M30 x 1,5	50	26	51	178	80	black	Nipple	2 219 841 2 05



to the assembly instruction

RADIATOR CONNECTIONS

Air bleeder valves turnable with o-ring G 1/2



INFO

- // Rotatable vent 360°
- // Venting hose attachable
- // Key control via SW5
- // O-ring sealing


TECHNICAL DATA

Material	Brass white / Brass chrome
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Colour	Item-No.
G 1/2	24	20	6,5	22	5	chrome	2 536 1201 02

RADIATOR CONNECTIONS



Compression fittings SpeedFIX



INFO

- // Preassembled and fixed
- // Clamping range 15mm
- // For copper, precision steel or (stainless) steel pipes with a wall thickness ≥ 1 mm (according to DIN EN 1057, DIN EN 10305-2 and DIN EN 10312)
- // Low tightening torque (easy mobility)
- // Suitable for district heating
- // EPDM sealing element
- // Eurocone compatible

TECHNICAL DATA

Material	Coated brass
Material moulded seal	EPDM
Material clamping ring	Brass blank
Max. operating pressure	10 bar
Max. operating temperature 	120 °C
Max. operating temperature 	95 °C

AG1	AG2	B mm	H mm	SW1 mm	Colour	Item-No
G 3/4	15 mm	33.2	20.5	30	chrome	2 855 0015 02
G 3/4	15 mm	33.2	20.5	30	white	2 855 0015 90




to the assembly instruction



to the product video





INFO

- // For double connection fittings
- // Can be cut for different pipe diameters
- // Flat design


TECHNICAL DATA

Material	ABS
Collar	Double

AM mm	L mm	B mm	H mm	R mm	Colour	Item-No
50	100	50	22	12, 15, 18, 20	chrome	2 612 5000 02
50	100	50	22	12, 15, 18, 20	white	2 612 5000 90

RADIATOR CONNECTIONS

Single collars



INFO

- // For single connection fittings
- // Flat design

TECHNICAL DATA

Material	ABS
Collar	Single

L mm	B mm	H mm	R mm	Colour	Item-No
45	45	11,6	15	chrome	2 613 5000 02
45	45	11,6	15	white	2 613 5000 90


OUTFLOW

- // Outflow valves
- // FE valves
- // SFE valves
- // Filling and draining plug
- // Filling and emptying tool



OUTFLOW

Outflow valves turnable with key control




INFO

- // With axial-rotating water output 360°
- // Key control via SW5
- // O-ring sealing

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar / 16 bar (with closed spindle and a max. operating temperature of 100°C)
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Color	Item-No
G 3/8	32	29	7	17	5	white	2 540 3800 01
G 3/8	32	29	7	17	5	black	2 540 3805 01
G 1/2	32	29	7	19	5	white	2 531 1200 01
G 1/2	32	29	7	19	5	black	2 531 1205 01



INFO

- // With axial-rotating water output 360°
- // Handwheel control
- // O-ring sealing


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar / 16 bar (with closed spindle and a max. operating temperature of 100°C)
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/4	31	36.3	6	17	2 540 1400 01
G 3/8	32	36.3	7	17	2 540 3801 01

OUTFLOW

Outflow valve




INFO

- // With fixed water outlet
- // With closure cap and knurled thread
- // Concealed spindle
- // Key control via SW5

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/8	32	29.5	12.5	18	2 421 3800 01



INFO

- // Fillable and drainable ball valve
- // For heat generation, storage tanks and pipe systems
- // With hose nozzle, protective cap, strap and lock nut
- // Self-sealing via PTFE sealing ring

TECHNICAL DATA

Material	Nickel-plated brass
Material Handles	Zinc Die Cast
Max. operating pressure	10 bar
Max. operating temperature	90 °C


AG1	L mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/8	72	46.8	15	21.5	2 947 3800 01
G 1/2	76	46.8	15	21.5	2 948 1200 01
G 3/4	72	46.8	10	27	2 947 3400 01



to the assembly instruction

OUTFLOW

SFE valves with handwheel control black




INFO

- // for heating circuit underfloor manifolds, heat generators, storage tanks and pipe systems
- // for flushing, filling, draining and venting
- // Outlet and test connection airtight up to 4 bar / watertight up to 6 bar
- // Suitable for electrical flushing/pressure testing units
- // Outlet can be rotated 360° with anti-twist protection and Euro cone
- // Threaded connection with O-ring seal

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	AG2	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 1/2	G 3/4	53,4	58,3	7.5	24	5	2 705 1200 01
G 3/4	G 3/4	56,2	61.3	7.3	24	5	2 705 3400 01
G 1	G 3/4	60,2	64,8	10	24	5	2 705 1000 01



INFO

- // for drinking water distributors, fresh water stations, storage tanks and pipe systems
- // UBA-compliant in accordance with the assessment basis for drinking water
- // For flushing, filling, draining and venting
- // Outlet and test connection airtight up to 4 bar / watertight up to 6 bar
- // Suitable for electrical flushing/pressure testing units
- // Outlet can be rotated 360° with anti-twist protection and Euro cone
- // Threaded connection with O-ring


TECHNICAL DATA

Material	Brass blank
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	AG2	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 1/4	G 3/4	53,2	58,3	6	22	5	2 705 1400 00
G 3/8	G 3/4	53,2	58,3	7.5	22	5	2 705 3800 00
G 1/2	G 3/4	53,4	58,3	7.5	24	5	2 705 1200 00

OUTFLOW

SFE valve




INFO

- // for drinking water distributors, fresh water stations, storage tanks and pipe systems
- // UBA-compliant in accordance with the assessment basis for drinking water
- // For flushing, filling, draining and venting
- // Outlet and test connection airtight up to 4 bar / watertight up to 6 bar
- // Suitable for electrical flushing/pressure testing units
- // Outlet can be rotated 360° with anti-twist protection and Euro cone
- // Threaded connection with O-ring

TECHNICAL DATA

Material	Brass blank
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	AG2	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 1/2	G 3/4	53,4	56	7.5	24	5	2715120000



INFO

- // For heating circuit manifolds, heat generators, storage tanks and pipe systems
- // Controlled filling and emptying
- // Suitable for filling and emptying tool 2 584 1001 00
- // O-ring sealing


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/2	25	20	10	22	2 580 1201 01

OUTFLOW

Filling and emptying tool



INFO

- // Suitable for filling/emptying plug 2 580 1201 01
- // Axial-rotating hose connection 360°
- // O-ring sealing

TECHNICAL DATA

Material	Brass blank
Max. operating pressure	10 bar
Max. operating temperature	90 °C

	L mm	H mm	SW1 mm	SW2 mm	Item-No
AG2 G 3/4	52,2	59	10	6	2 584 1005 00



to the assembly instruction

VENTING


// Air bleeder valves

// Automatic ventings



VENTING

Air bleeder valves turnable with o-ring




INFO

- // Rotatable vent 360°
- // Venting hose attachable
- // Key control via SW5
- // O-ring sealing

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar / 16 bar (with closed spindle and a max. operating temperature of 100°C)
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Color	Item-No
G 3/8	21	22,5	7	19	5	white	2 532 3800 01
G 3/8	21	22,5	7	19	5	black	2 537 3805 01
G 1/2	24	20	6,5	22	5	white	2 537 1200 01
G 1/2	24	20	6,5	22	5	black	2 537 1205 01



INFO

- // Rotatable vent 360°
- // Venting hose attachable
- // Key control via SW5
- // O-ring sealing


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar / 16 bar (with closed spindle and a max. operating temperature of 100°C)
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Color	Item-no
G 1/4	21,5	25,2	7	15	5	white	2 531 1400 01
G 1/4	21,5	25,2	7	15	5	black	2 531 1405 01

VENTING

Air bleeder valves turnable with o-ring G 1/8




INFO

- // Rotatable vent 360°
- // Venting hose attachable
- // Key control via SW5
- // O-ring sealing

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar / 16 bar (with closed spindle and a max. operating temperature of 100°C)
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Color	Item-No
G 1/8	17,2	23,8	6,5	11	5	white	2 535 1800 01
G 1/8	17,2	23,8	6,5	11	5	black	2 535 1805 01



INFO

- // Venting with drip eye
- // With fixed air outlet
- // Key control via SW5
- // Conical thread


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar / 16 bar (with closed spindle and a max. operating temperature of 100°C)
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
R 1/8	12.7	18.9	6	11	5	2 105 1800 01

VENTING

Air bleeder valves with key control




INFO

- // With fixed air outlet
- // Venting hose attachable
- // Key control via SW5
- // With knurled thread

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar / 16 bar (with closed spindle and a max. operating temperature of 100°C)
Max. operating temperature	130 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Item-No
G 1/8	19	26	7	12	5	2 110 1800 01
G 1/4	20	26	7	15	5	2 110 1400 01
G 3/8	21	26,9	7	17	5	2 110 3801 01



INFO

- // Rotatable vent 360°
- // Venting hose attachable
- // Key control via SW5
- // O-ring sealing


TECHNICAL DATA

Material	Brass chrome
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	SW2 mm	Colour	Item-No
G 1/2	24	20	6.5	22	5	chrome	2 536 1201 02

VENTING

Automatic venting with o-ring



INFO

- // Automatic venting version
- // With expanding washers
- // With axial-rotating venting 360°
- // O-ring sealing


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	8,5 bar
Max. operating temperature	115 °C

AG1	L mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/2	36	25	9	19	2 520 1200 01



to the assembly instruction



INFO

- // Venting with drip eye
- // With fixed air outlet
- // Automatic venting version
- // With expanding washers
- // With knurled thread

TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	8,5 bar
Max. operating temperature	115 °C


AG1	L mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/8	16	25	8.5	14	2 120 1800 01
G 1/4	17	25	8.5	15	2 120 1400 01
G 3/8	19.5	25	10	17	2 120 3800 01



to the assembly instruction


PLUGS AND REDUCTIONS

- // Reductions
- // Plugs
- // Connecting plug
- // Sealing plug

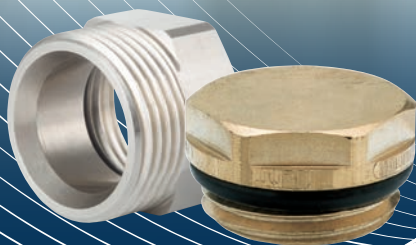

PLUGS AND REDUCTIONS

Connection pieces




INFO

// O-ring sealing on the external thread

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 3/4	G 1/2	34.6	31	10	30	2 550 1234 01
G 1	G 3/4	41.6	28.5	10	36	2 550 3410 01



INFO

- // With EPDM seal
- // Female thread flat sealing


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Item-No
G 1/2	G 3/8	27	28	9	10	24	2 549 1238 01

PLUGS AND REDUCTIONS

Connection plug




INFO

- // Flat design
- // O-ring sealing on the external thread

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	Thread	AG2	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/2	right	G 3/8	24	13	7	22	2 550 1238 99
G 3/4	right	G 1/2	32	14.5	7.5	27	2 550 3412 01
G 1 1/2	left	G 1/2	55	24	11	32	2 550 4112 01



INFO

- // Reinforced version
- // O-ring sealing on the external thread


TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 1/2	G 3/8	25	21.5	8	22	2 551 1238 01

PLUGS AND REDUCTIONS

Radiator connection plug



INFO

- // For tubes, left and DIN radiators
- // Flat sealing version

TECHNICAL DATA

Material	Steel
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	Thread	AG2	B mm	H mm	GL1 mm	SW1 mm	Item-No
G 1 1/4	left	G 1 1/2	56	27.2	14.5	41	2 350 5412 03
G 1 1/4	right	G 1 1/2	56	27.2	14.5	41	2 351 5412 03



INFO

- // Matching gasket for the HUMMEL range of steel plugs
- // Graphitised front and back


TECHNICAL DATA

Material	Tesnite BA50
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	L mm	B mm	H mm	Item-No
1 1/4	55	55	1	2 402 0000 04

PLUGS AND REDUCTIONS

Radiator plug



INFO

- // For radiators, fittings, devices and assemblies
- // O-ring sealing

TECHNICAL DATA

Material	Brass blank / Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	130 °C

AG1	B mm	H mm	GL1 mm	SW1 mm	Material	Item-No
G 1/8	13	11	5.8	10	Nickel-plated brass	2 500 1800 01
G 1/4	18.9	13	7	17	Nickel-plated brass	2 500 1400 01
G 3/8	21	13.5	7.4	19	Nickel-plated brass	2 500 3800 01
G 1/2	24	12.8	7	22	Brass blank	2 506 1200 00
G 1/2	24	12.8	7	22	Nickel-plated brass	2 506 1200 01
G 3/4	32	14	7.3	27	Nickel-plated brass	2 500 3400 01
G 1	40	18	10	32	Nickel-plated brass	2 500 1000 01


ACCESSORIES

- // Collars
- // Air bleed key
- // Tools
- // Small parts
- // Seals
- // Sealing caps



ACCESSORIES

Double collars




INFO

- // For double connection fittings
- // Can be cut for different pipe diameters
- // Flat design

TECHNICAL DATA

Material	ABS
Collar	Double

AM mm	L mm	B mm	H mm	R mm	Colour	Item-No
50	100	50	22	12, 15, 18, 20	chrome	2 612 5000 02
50	100	50	22	12, 15, 18, 20	white	2 612 5000 11
50	100	50	22	12, 15, 18, 20	anthracite	2 612 5070 16
50	100	50	22	14, 16, 17, 20	white	2 612 5001 11



INFO

// For single connection fittings

// Flat design


TECHNICAL DATA

Material	ABS
Collar	Single

L mm	B mm	H mm	R mm	Colour	Item-No
45	45	11.6	15	chrome	2 613 5000 02
45	45	11.6	15	white	2 613 5000 90

ACCESSORIES

Cover for Quadro valve terminal block

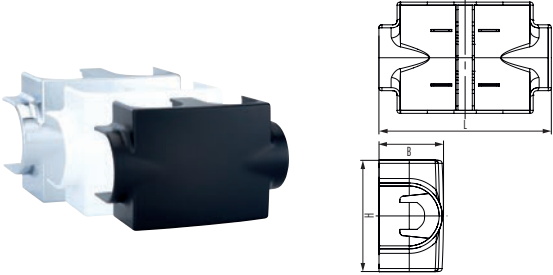


INFO

// Cover for Quadro valve terminal block

TECHNICAL DATA

Material	ABS
----------	-----

L mm	B mm	H mm	Colour	Item-No
114	42,6	73,5	chrome	2 219 8400 02
114	42,6	73,5	black	2 219 8400 05
114	42,6	73,5	white	2 219 8400 90



INFO

- // For all vent and drain valves with square SW 5
- // Square SW 5
- // With manufacturer's mark


TECHNICAL DATA

Material	Zinc Die Cast
Colour	blue chromated

L mm	B mm	H mm	SW1 mm	Item-No
25	9	26	5.1	2 400 0500 05

ACCESSORIES

Air bleed key made of plastic




INFO

- // For all vent and drain valves with square SW 5
- // Square SW 5
- // With manufacturer's mark

TECHNICAL DATA

Material	Plastic
Colour	blue

L mm	B mm	H mm	SW1 mm	Item-No
24	10	27	5.1	2 410 0500 11



INFO

- // For all coated union nuts and compression fittings with SW 30
- // Installation aid for union nut SW 30 to retain, loosen, tighten
- // To protect against surface damage

TECHNICAL DATA

Material	Polyamide
Colour	blue

L mm	H mm	SW1 mm	Item-No
42.5	12	30	2 900 0380 03

ACCESSORIES

Venting hoses



INFO

- // For vent and drain valves with hose transition
- // Construction length on request, min. 1m

TECHNICAL DATA

Material	PVC
Colour	transparent

B mm	H mm	Item-No
6	6	2 405 0400 19
14	14	2 405 0401 19



INFO

// For fittings, adapters and transitions in flat sealing design



TECHNICAL DATA

Material	Polyamide
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	L mm	B mm	H mm	Item-No
3/4	21	21	7.7	2 855 3401 00

ACCESSORIES

Connector nipple made of brass



left: 2 555 1234 00 | right: 2 558 1234 00


INFO

- // For connecting fittings to radiators
- // Flat sealing and conical sealing design
- // O-ring sealing

TECHNICAL DATA

Material	Brass blank
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	120 °C

AG1	AG2	L mm	B mm	H mm	GL1 mm	GL2 mm	SW1 mm	Version	Item-No
G 3/4	G 1/2	26.4	26.4	16.5	9.5	7	12	conical sealing	2 555 1234 00
G 3/4	G 1/2	26.4	26.4	16.5	9.5	7	12	flat sealing	2 558 1234 00



INFO

- // For drain valves, FE ball valve and SFE valve
- // Suitable for hoses 1/2"
- // O-ring sealing

TECHNICAL DATA

Material	Brass blank
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	L mm	B mm	H mm	SW1 mm	Item-No
G 3/4	26.4	14.4	33	30	2730341203

ACCESSORIES

Sealing cap with strap




INFO

- // For drain valves, FE ball valve and SFE valve
- // Metallic design including seal
- // Flexible retaining loop as loss protection
- // Drip fuse

TECHNICAL DATA

Material	Nickel-plated brass
Material moulded seal	EPDM
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	L mm	B mm	H mm	SW1 mm	Item-No
G 3/4	100	26.4	26.4	30	2 810 0279 13



INFO

- // For HUMMEL FE ball valve and SFE valve
- // For sealing when the hose nozzle is not attached


TECHNICAL DATA

Material	Nickel-plated brass
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	L mm	B mm	H mm	SW1 mm	Item-No
G 3/4	26.4	26.4	13.7	30	2 947 0001 01

ACCESSORIES

Seal für sealing cap



INFO

- // Suitable for cap G 3/4
- // High quality gasket

TECHNICAL DATA

Material	EPDM
Max. operating pressure	10 bar
Max. operating temperature	90 °C

AG1	L mm	B mm	H mm	Item-No
3/4	25	25	2	2 947 0002 11

ACCESSORIES, SPARE PARTS AND TOOLS

Spare parts



Flat sealing

Item-No DAD5-70B00A

for terminal block for one-pipe systems (until year of construction/catalog 2020), diverters, terminal block for two-pipe systems



O-Ring

Item-No TAX3-7G1620

for single connection, cam, Y-piece



Protective cap

Item-No DAK1-1MB30A

for thermostatic valve M30 x 1.5 mm



Valve insert

Item-No DAT1-CVS13A

for TBblock (until year of construction/catalog 2020), thermostatic valve (angled, corner or straight type), thermostatic valve Designtechnik (until year of construction/catalog 2020)



Valve insert

Item-No DAT1-CVS13B

for design fitting set no. 1 corner type and set no. 2 straight type (from year of construction/catalog 2021)



Valve insert

Item-No DAT1-CVS12B


for thermostatic valve Designtechnik, flow and returnflow reversed (until year of construction/catalog 2020)



Valve insert

Item-No DAT1-HKV200

for heating distributors



Valve insert

Item-No DAT1-QVS001

continuously adjustable valve terminal block Quadro



Flow rate controller

Item-No DAT1-HKV100

for heating distributors

INDEX NUMERIC

Item-No	Description	Page	Item-No	Description	Page
2105180001	Air bleeder valve with key control R 1/8	109	2256843401	Single-connection fittings corner type	73
2110140001	Air bleeder valves with key control	110	2256843501	Single-connection fittings corner type	73
2110180001	Air bleeder valves with key control	110	2257000101	Mounting bridge	62
2110380101	Air bleeder valves with key control	110	2257000201	Diverter straight type	50
2120140001	Automatic ventings	113	2257000301	Diverter straight type	50
2120180001	Automatic ventings	113	2257000401	Diverter straight type lockable	53
2120380001	Automatic ventings	113	2257000501	Diverter straight type lockable	53
2155343401	Cone adapter	56	2257000801	Y pieces	61
2218343501	Two-pipe terminal blocks straight type drainable	67	2257000901	Y pieces	61
2218343601	Two-pipe terminal blocks straight type drainable	67	2257001001	Diverter corner type lockable	54
2218843501	Two-pipe terminal blocks corner type drainable	68	2257001101	Diverter corner type lockable	54
2218843601	Two-pipe terminal blocks corner type drainable	68	2257002101	Two-pipe terminal blocks straight type (quadruple connection)	69
2219840002	Cover for Quadro valve terminal, chrome	126	2257002201	Two-pipe terminal blocks straight type (quadruple connection)	69
2219840005	Cover for Quadro valve terminal, black	126	2257002301	Diverter Straight type lockable (one/two pipe)	51
2219840090	Cover for Quadro valve terminal, white	126	2257002401	Diverter Straight type lockable (one/two pipe)	51
2219841202	Quadro Valve terminal block	76, 90	2257002601	Diverter Corner type lockable (one/two pipe)	52
2219841205	Quadro Valve terminal block	76, 90	2257002701	Diverter Corner type lockable (one/two pipe)	52
2219841290	Quadro Valve terminal block	76, 90	2350541203	Radiator plug	120
2248343501	One-pipe terminal blocks straight type	70	2351541203	Radiator plug	120
2248343601	One-pipe terminal blocks straight type	70	2351543803	Radiator plug	120
2248843501	One-pipe terminal blocks corner type	71	2353123401	Steel pipe adapter with Eurocone internal thread	30
2248843601	One-pipe terminal blocks corner type	71	2353383401	Steel pipe adapter with Eurocone internal thread	30
2249343501	Two-pipe terminal blocks straight type	65	2354123401	Steel pipe adapter with Eurocone external thread	31
2249343601	Two-pipe terminal blocks straight type	65	2354343401	Steel pipe adapter with Eurocone external thread	31
2249843501	Two-pipe terminal blocks corner type	66	2354383401	Steel pipe adapter with Eurocone external thread	31
2249843601	Two-pipe terminal blocks corner type	66	2355101001	Steel pipe adapter with external thread	33
2253343400	Coupling nipple	26, 42	2355121201	Steel pipe adapter with external thread	33
2253343401	Coupling nipple	42	2355343401	Steel pipe adapter with external thread	33
2253349001	Coupling angle	47	2355381201	Steel pipe adapter with external thread	33
2253349201	Coupling angle	47	2355383801	Steel pipe adapter with external thread	33
2253349500	Coupling T piece	27, 46	2355545401	Steel pipe adapter with external thread	33
2253349501	Coupling T piece	46	2355646401	Steel pipe adapter with external thread	33
2254124401	Reductions with internal thread	43	2356121201	Steel pipe adapter with internal thread	32
2254583401	Reductions with internal thread	43	2356381201	Steel pipe adapter with internal thread	32
2256123401	Single-connection fittings straight type with internal thread	74	2360540003	Radiator nipple	
2256123501	Single-connection fittings straight type with internal thread	74	2400050005	Air bleed key made of zinc die casting	127
2256343401	Single-connection fittings straight type	72	2402000004	Flat sealing	121
2256343501	Single-connection fittings straight type	72	2405040019	Outflow valve	130
2256841201	Single-connection fittings corner type with internal thread	75			
2256841301	Single-connection fittings corner type with internal thread	75			

Item-No	Description	Page	Item-No	Description	Page
2 405 0401 19	Outflow valve	130	2 555 1234 00	Connection nipple made of brass	132
2 410 0500 11	Air bleed key made of plastic	128	2 555 3434 01	Extension piece	60
2 421 3800 01	Outflow valve	98	2 556 3412 01	Excenters for connection fittings	55
2 500 1000 01	Radiator plug	122	2 556 3422 01	Excenters for connection fittings	55
2 500 1400 01	Radiator plug	122	2 556 3434 01	Excenters for connection fittings	55
2 500 1800 01	Radiator plug	122	2 558 1234 00	Connection nipple made of brass	132
2 500 3400 01	Radiator plug	122	2 559 1200 01	Telescopic connections	58
2 500 3800 01	Radiator plug	122	2 559 3400 01	Telescopic connections	58
2 506 1200 00	Radiator plug	122	2 559 3412 01	Threaded pipe adapter	59
2 506 1200 01	Radiator plug	122	2 559 3434 01	Telescopic adapter	57
2 520 1200 01	Automatic venting with O-Ring	112	2 559 3435 01	Telescopic adapter	57
2 531 1200 01	Outflow valves turnable with key control	96	2 559 3436 01	Telescopic adapter	57
2 531 1205 01	Outflow valves turnable with key control	96	2 559 3438 01	Threaded pipe adapter	59
2 531 1400 01	Air bleeder valves with O-Ring G 1/4	107	2 559 3800 01	Telescopic connections	58
2 531 1405 01	Air bleeder valves with O-Ring G 1/4	107	2 580 1201 01	Filling/draining plug	103
2 532 3800 01	Air bleeder valves turnable with O-ring	106	2 584 1005 00	Filling and emptying tool	104
2 535 1800 01	Air bleeder valves turnable with O-ring G 1/8	108	2 612 5000 02	Double collars	96, 124
2 535 1805 01	Air bleeder valves turnable with O-ring G 1/8	108	2 612 5000 11	Double collars	124
2 536 1201 02	Air bleeder valves turnable with O-ring G 1/2	82, 111	2 612 5000 90	Double collars	93
2 536 1201 90	Air bleeder valves turnable with O-ring G 1/2	82, 111	2 612 5001 11	Double collars	124
2 537 1200 01	Air bleeder valves turnable with O-ring	106	2 612 5070 16	Double collars	124
2 537 1205 01	Air bleeder valves turnable with O-ring	106	2 613 5000 02	Single collars	94, 125
2 537 3805 01	Air bleeder valves turnable with O-ring	106	2 613 5000 90	Single collars	94, 125
2 540 1400 01	Outflow valves turnable with handwheel	97	2 705 1000 01	SFE valves with handwheel black	100
2 540 3800 01	Outflow valves turnable with key control	96	2 705 1200 00	SFE valves with handwheel	101
2 540 3801 01	Outflow valves turnable with handwheel	97	2 705 1200 01	SFE valves with handwheel black	100
2 540 3805 01	Outflow valves turnable with key control	96	2 705 1400 00	SFE valves with handwheel	101
2 549 1238 01	Reduction	117	2 705 3400 01	SFE valves with handwheel black	100
2 549 3412 01	Reductions with external thread	44	2 705 3800 00	SFE valves with handwheel	101
2 550 1234 01	Connection pieces	116	2 715 1200 00	SFE valve	102
2 550 1238 99	Connection plug	118	2 730 3412 03	Hose nozzle	133
2 550 3410 01	Connection pieces	116	2 755 1010 00	Drinking water-Steel pipe adapter with external thread	18, 34
2 550 3412 01	Connection plug	118	2 755 1212 00	Drinking water-Steel pipe adapter with external thread	18, 34
2 550 4112 01	Connection plug	118	2 755 3434 00	Drinking water-Steel pipe adapter with external thread	18, 34
2 551 1238 01	Connection plug reinforced	119	2 755 5454 00	Drinking water-Steel pipe adapter with external thread	18, 34
2 552 1234 01	Coupling angle with union nut	48	2 755 6464 00	Drinking water-Steel pipe adapter with external thread	18, 34
2 554 1234 00	Connection nipple	24, 40	2 810 0279 13	Sealing cap with strap	134
2 554 1234 01	Connection nipple	40	2 810 0320 13	Emergency service case	13
2 554 2234 01	Reductions with external thread	44	2 810 0320 20	Steel pipe adapter case	15
2 554 3434 00	Connection nipple flat sealing	25, 41	2 810 0381 02	Set 1 corner type	90
			2 810 0381 90	Set 1 corner type	90
			2 810 0382 02	Set 2 straight type	91
			2 810 0382 90	Set 2 straight type	91

INDEX NUMERIC

Item-No	Description	Page	Item-No	Description	Page
2 823 3434 01	Flexible device connections	63	2 862 1602 01	Compression fittings MKV-K	21, 37
2 826 1238 341	Flexible radiator connections with reduction	64	2 862 1618 01	Compression fittings MKV-K	21, 37
2 827 1238 341	Flexible radiator connections with reduction	64	2 862 1622 01	Compression fittings MKV-K	21, 37
2 828 1238 341	Flexible radiator connections with reduction	64	2 862 1702 01	Compression fittings MKV-K	21, 37
2 829 1238 341	Flexible radiator connections with reduction	64	2 862 1725 01	Compression fittings MKV-K	21, 37
2 830 3434 01	Flexible device connections	63	2 862 1802 01	Compression fittings MKV-K	21, 37
2 855 0001 01	Compression fittings MKV-M	20, 36	2 862 2002 01	Compression fittings MKV-K	21, 37
2 855 0002 01	Compression fittings MKV-M	20, 36	2 862 2025 01	Compression fittings MKV-K	21, 37
2 855 0003 01	Compression fittings MKV-M	20, 36	2 862 2028 01	Compression fittings MKV-K	21, 37
2 855 0015 01	Compression fittings SpeedFIX	19, 35	2 862 2029 01	Compression fittings MKV-K	21, 37
2 855 0015 02	Compression fittings SpeedFIX	19, 35, 92	2 900 0380 03	Mounting help	129
2 855 0015 90	Compression fittings SpeedFIX	19, 35, 92	2 904 1200 01	Thermostatic valve corner type (internal thread)	80
2 855 3401 00	Cone inserts	132	2 904 1234 01	Thermostatic valves corner type (Eurocone)	78
2 859 3435 01	Telescopic adapter	57	2 904 3400 01	Thermostatic valve corner type (internal thread)	80
2 862 0001 01	Compression fittings MKV-K sets	23, 39	2 904 3800 01	Thermostatic valve corner type (internal thread)	80
2 862 0002 01	Compression fittings MKV-K sets	23, 39	2 905 1200 01	Threaded-joint radiator returns corner type (internal thread)	86
2 862 0003 01	Compression fittings MKV-K sets	23, 39	2 905 3400 01	Threaded-joint radiator returns corner type (internal thread)	86
2 862 0004 01	Compression fittings MKV-K sets	23, 39	2 905 3800 01	Threaded-joint radiator returns corner type (internal thread)	86
2 862 0005 01	Compression fittings MKV-K sets	23, 39	2 907 0001 02	Thermostatic heads M30 x 1,5	87
2 862 0006 01	Compression fittings MKV-K sets	23, 39	2 907 0001 05	Thermostatic heads M30 x 1,5	87
2 862 0007 01	Compression fittings MKV-K sets	23, 39	2 907 0001 90	Thermostatic heads M30 x 1,5	87
2 862 0008 01	Compression fittings MKV-K sets	23, 39	2 908 3412 01	Threaded joint connector	45
2 862 0009 01	Compression fittings MKV-K sets	23, 39	2 914 1200 01	Thermostatic valve Straight type (internal thread)	79
2 862 0010 01	Compression fittings MKV-K sets	23, 39	2 914 1234 01	Thermostatic valves Straight type (Eurocone)	77
2 862 0011 01	Compression fittings MKV-K sets	23, 39	2 914 3400 01	Thermostatic valve Straight type (internal thread)	79
2 862 0012 01	Compression fittings MKV-K sets	23, 39	2 914 3800 01	Thermostatic valve Straight type (internal thread)	79
2 862 0013 01	Compression fittings MKV-K sets	23, 39	2 915 1200 01	Threaded-joint radiator returns Straight type (internal thread)	85
2 862 0014 01	Compression fittings MKV-K sets	23, 39	2 915 3400 01	Threaded-joint radiator returns straight type (internal thread)	85
2 862 0015 01	Compression fittings MKV-K sets	23, 39	2 915 3800 01	Threaded-joint radiator returns straight type (internal thread)	85
2 862 0016 01	Compression fittings MKV-K sets	23, 39	2 920 1234 01	Threaded-joint radiator return straight type (Eurocone)	83
2 862 0017 01	Compression fittings MKV-K sets	23, 39	2 922 1234 01	Thermostatic valves angle corner type right	81
2 862 0018 01	Compression fittings MKV-K sets	23, 39	2 923 1234 01	Thermostatic valves angle corner type left	82
2 862 0019 01	Compression fittings MKV-K sets	23, 39			
2 862 0020 01	Compression fittings MKV-K sets	23, 39			
2 862 0021 01	Compression fittings MKV-K sets	23, 39			
2 862 0022 01	Compression fittings MKV-K sets	23, 39			
2 862 0023 01	Compression fittings MKV-K sets	23, 39			
2 862 0024 01	Compression fittings MKV-K sets	23, 39			
2 862 0025 01	Compression fittings MKV-K sets	23, 39			
2 862 0026 01	Compression fittings MKV-K sets	23, 39			
2 862 0027 01	Compression fittings MKV-K sets	23, 39			
2 862 0028 01	Compression fittings MKV-K sets	23, 39			
2 862 1202 01	Compression fittings MKV-K	21, 37			
2 862 1402 01	Compression fittings MKV-K	21, 37			

Item-No	Description	Page
2 925 1234 01	Threaded-joint radiator return Corner type (Eurocone)	84
2 947 0001 01	Sealing cap	135
2 947 0002 11	Seal for Sealing cap	136
2 947 3400 01	FE valves	99
2 947 3800 01	FE valves	99
2 948 1200 01	FE valves	99
DAD5-70B00A	Flat sealing	137
TAX3-7G1620	O-Ring	137
DAK1-1MB30A	Protective cap	137
DAT1-CVS13A	Valve insert	137
DAT1-CVS13B	Valve insert	137
DAT1-CVS12B	Valve insert	137
DAT1-HKV200	Valve insert	137
DAT1-QVS001	Valve insert	137
DAT1-HKV100	Flow rate controller	137

INDEX ALPHABETICAL

Item-No	Description	Page	Item-No	Description	Page
2 410 0500 11	Air bleed key made of plastic	128	2 862 0015 01	Compression fittings MKV-K Sets	23
2 400 0500 05	Air bleed key made of zinc die casting	127	2 862 0016 01	Compression fittings MKV-K Sets	23
2 105 1800 01	Air bleeder valve with key control R 1/8	109	2 862 0017 01	Compression fittings MKV-K Sets	23
2 532 3800 01	Air bleeder valves turnable with O-Ring	106	2 862 0018 01	Compression fittings MKV-K Sets	23
2 537 1200 01	Air bleeder valves turnable with O-Ring	106	2 862 0019 01	Compression fittings MKV-K Sets	23
2 537 1205 01	Air bleeder valves turnable with O-Ring	106	2 862 0020 01	Compression fittings MKV-K Sets	23
2 537 3805 01	Air bleeder valves turnable with O-Ring	106	2 862 0021 01	Compression fittings MKV-K Sets	23
2 536 1201 02	Air bleeder valves turnable with O-Ring G 1/2	92, 111	2 862 0022 01	Compression fittings MKV-K Sets	23
2 535 1800 01	Air bleeder valves turnable with O-Ring G 1/8	108	2 862 0023 01	Compression fittings MKV-K Sets	23
2 535 1805 01	Air bleeder valves turnable with O-Ring G 1/8	108	2 862 0024 01	Compression fittings MKV-K Sets	23
2 531 1400 01	Air bleeder valves with O-Ring G 1/4	107	2 862 0025 01	Compression fittings MKV-K Sets	23
2 531 1405 01	Air bleeder valves with O-Ring G 1/4	107	2 862 0026 01	Compression fittings MKV-K Sets	23
2 110 1400 01	Air bleeder valves with key control	110	2 862 0027 01	Compression fittings MKV-K Sets	23
2 110 1800 01	Air bleeder valves with key control	110	2 862 0028 01	Compression fittings MKV-K Sets	23
2 110 3801 01	Air bleeder valves with key control	110	2 855 0001 01	Compression fittings MKV-M	20, 36
2 520 1200 01	Automatic venting with O-Ring	112	2 855 0002 01	Compression fittings MKV-M	20, 36
2 120 1400 01	Automatic ventings	113	2 855 0003 01	Compression fittings MKV-M	20, 36
2 120 1800 01	Automatic ventings	113	2 855 0015 01	Compression fittings SpeedFIX	19, 35, 92
2 120 3800 01	Automatic ventings	113	2 855 0015 02	Compression fittings SpeedFIX	19, 35, 92
2 862 1202 01	Compression fittings MKV-K	21, 37	2 855 0015 90	Compression fittings SpeedFIX	19, 35
2 862 1402 01	Compression fittings MKV-K	21	2 155 3434 01	Cone adapter	56
2 862 1602 01	Compression fittings MKV-K	21	2 855 3401 00	Cone inserts	131
2 862 1618 01	Compression fittings MKV-K	21	2 554 1234 00	Connection nipple	24, 40
2 862 1622 01	Compression fittings MKV-K	21	2 554 1234 01	Connection nipple	40
2 862 1702 01	Compression fittings MKV-K	21	2 555 1234 00	Connection nipple made of brass	132
2 862 1725 01	Compression fittings MKV-K	21	2 558 1234 00	Connection nipple made of brass	132
2 862 1802 01	Compression fittings MKV-K	21	2 558 1234 01	Connection nipple made of brass nickel plated brass	133
2 862 2002 01	Compression fittings MKV-K	21	2 554 3434 00	Connection nipple flat sealing	25, 41
2 862 2025 01	Compression fittings MKV-K	21	2 550 1234 01	Connection pieces	116
2 862 2028 01	Compression fittings MKV-K	21, 37	2 550 3410 01	Connection pieces	116
2 862 2029 01	Compression fittings MKV-K	21, 37	2 550 1238 99	Connection plug	118
2 862 0001 01	Compression fittings MKV-K Sets	23	2 550 3412 01	Connection plug	118
2 862 0002 01	Compression fittings MKV-K Sets	23	2 550 4112 01	Connection plug	118
2 862 0003 01	Compression fittings MKV-K Sets	23	2 551 1238 01	Connection plug reinforced	119
2 862 0004 01	Compression fittings MKV-K Sets	23	2 219 8412 02	Cover for Quadro valve terminal block, chrome	126
2 862 0005 01	Compression fittings MKV-K Sets	23	2 219 8412 05	Cover for Quadro valve terminal block, black	126
2 862 0006 01	Compression fittings MKV-K Sets	23	2 219 8412 90	Cover for Quadro valve terminal block, white	126
2 862 0007 01	Compression fittings MKV-K Sets	23	2 253 3495 00	Coupling T piece	27, 46
2 862 0008 01	Compression fittings MKV-K Sets	23	2 253 3495 01	Coupling T piece	46
2 862 0009 01	Compression fittings MKV-K Sets	23	2 253 3434 00	Coupling nipple	26, 42
2 862 0010 01	Compression fittings MKV-K Sets	23	2 253 3434 01	Coupling nipple	42
2 862 0011 01	Compression fittings MKV-K Sets	23	2 253 3490 01	Coupling angle	47
2 862 0012 01	Compression fittings MKV-K Sets	23	2 253 3492 01	Coupling angle	47
2 862 0013 01	Compression fittings MKV-K Sets	23			
2 862 0014 01	Compression fittings MKV-K Sets	23			

INDEX ALPHABETICAL

Item-No	Description	Page	Item-No	Description	Page
2552 1234 01	Coupling angle with union nut	48	2828 1238 341	Flexible radiator connections with reduction	64
2257 0002 01	Diverters straight type	50	2829 1238 341	Flexible radiator connections with reduction	64
2257 0003 01	Diverters straight type	50	DAT1-HKV100	Flow rate controller	137
2257 0004 01	Diverters straight type lockable	53	2730 3412 03	Hose nozzle	133
2257 0005 01	Diverters straight type lockable	53	2257 0001 01	Mounting bridge	62
2257 0023 01	Diverters straight type lockable (One/two pipe)	51	2900 0380 03	Mounting help	129
2257 0024 01	Diverters straight type lockable (One/two pipe)	51	2248 3435 01	One-pipe terminal blocks Straight type	70
2257 0010 01	Diverters corner type lockable	54	2248 3436 01	One-pipe terminal blocks Straight type	70
2257 0011 01	Diverters corner type lockable	54	2248 8435 01	One-pipe terminal blocks Corner type	71
2257 0026 01	Diverters corner type lockable (One/two pipe)	52	2248 8436 01	One-pipe terminal blocks Corner type	71
2257 0027 01	Diverters corner type lockable (One/two pipe)	52	TAX3-7G1620	O-ring	137
2612 5000 02	Double collars	93, 124	2421 3800 01	Outflow valve	98
2612 5000 11	Double collars	124	2540 1400 01	Outflow valves turnable with handwheel	97
2612 5000 90	Double collars	93, 124	2540 3801 01	Outflow valves turnable with handwheel	97
2612 5001 11	Double collars	124	2531 1200 01	Outflow valves turnable with key control	96
2612 5070 16	Double collars	124	2531 1205 01	Outflow valves turnable with key control	96
2755 1010 00	Drinking water-steel pipe adapter with external thread	18, 34	2540 3800 01	Outflow valves turnable with key control	96
2755 1212 00	Drinking water-steel pipe adapter with external thread	18, 34	2540 3805 01	Outflow valves turnable with key control	96
2755 3434 00	Drinking water-steel pipe adapter with external thread	18, 34	2405 0400 19	Outflow valve	130
2755 5454 00	Drinking water-steel pipe adapter with external thread	18, 34	2405 0401 19	Outflow valve	130
2755 6464 00	Drinking water-steel pipe adapter with external thread	18, 34	DAK1-1MB30A	Protective cap	137
2810 0320 13	Emergency service case	13	2219 8412 02	Quadro Valve terminal block	76, 90
2556 3412 01	Excenters for connection fittings	55	2219 8412 05	Quadro Valve terminal block	76, 90
2556 3422 01	Excenters for connection fittings	55	2219 8412 90	Quadro Valve terminal block	76, 90
2556 3434 01	Excenters for connection fittings	55	2350 5412 03	Radiator plug	120
2555 3434 01	Extension piece	60	2351 5412 03	Radiator plug	120
2947 3400 01	FE valves	99	2500 1000 01	Radiator plug	122
2947 3800 01	FE valves	99	2500 1400 01	Radiator plug	122
2948 1200 01	FE valves	99	2500 1800 01	Radiator plug	122
2584 1005 00	Filling and emptying tool	104	2500 3400 01	Radiator plug	122
2580 1201 01	Filling/drainig plug	103	2500 3800 01	Radiator plug	122
2402 0000 04	Flat sealing	121	2506 1200 00	Radiator plug	122
DAD5-70B00A	Flat sealing	137	2506 1200 01	Radiator plug	122
2823 3434 01	Flexible device connections	63	2549 1238 01	Reduction	117
2830 3434 01	Flexible device connections	63	2549 3412 01	Reductions with external thread	44
2826 1238 341	Flexible radiator connections with reduction	64	2554 2234 01	Reductions with external thread	44
2827 1238 341	Flexible radiator connections with reduction	64	2254 1244 01	Reductions with internal thread	43
			2254 5834 01	Reductions with internal thread	43
			2947 0002 11	Seal for Sealing cap	136
			2613 5000 02	Single collars	94, 125
			2613 5000 90	Single collars	94, 125
			2256 3434 01	Single-connection fittings Straight type	72

INDEX ALPHABETICAL

Item-No	Description	Page	Item-No	Description	Page
2256 3435 01	Single-connection fittings Straight type	72	2559 3400 01	Telescopic connections	58
2256 1234 01	Single-connection fittings Straight type with internal thread	74	2559 3800 01	Telescopic connections	58
2256 1235 01	Single-connection fittings Straight type with internal thread	74	2907 0001 02	Thermostatic heads M30 x 1,5	87
2256 8434 01	Single-connection fittings Corner type	73	2907 0001 05	Thermostatic heads M30 x 1,5	87
2256 8435 01	Single-connection fittings Corner type	73	2907 0001 90	Thermostatic heads M30 x 1,5	87
2256 8412 01	Single-connection fittings Corner type with internal thread	75	2914 1234 01	Thermostatic valves straight type (Eurocone)	77
2256 8413 01	Single-connection fittings Corner type with internal thread	75	2904 1234 01	Thermostatic valves corner type (Eurocone)	78
2810 0381 02	Set 1 Corner type	88	2923 1234 01	Thermostatic valves angle corner type left	82
2810 0381 90	Set 1 Corner type	88	2922 1234 01	Thermostatic valves angle corner type right	81
2810 0382 02	Set 2 Straight type	89	2914 1200 01	Thermostatic valve straight type (internal thread)	79
2810 0382 90	Set 2 Straight type	89	2914 3400 01	Thermostatic valve straight type (internal thread)	79
2715 1200 00	SFE valve	102	2914 3800 01	Thermostatic valve straight type (internal thread)	79
2705 1200 00	SFE valves with handwheel	101	2904 1200 01	Thermostatic valve corner type (internal thread)	80
2705 1400 00	SFE valves with handwheel	101	2904 3400 01	Thermostatic valve corner type (internal thread)	80
2705 3800 00	SFE valves with handwheel	101	2904 3800 01	Thermostatic valve corner type (internal thread)	80
2705 1000 01	SFE valves with handwheel black	100	2908 3412 01	Threaded joint connector	45
2705 1200 01	SFE valves with handwheel black	100	2559 3412 01	Threaded pipe adapter	59
2705 3400 01	SFE valves with handwheel black	100	2559 3438 01	Threaded pipe adapter	59
2355 1010 01	Steel pipe adapter with external thread	33	2920 1234 01	Threaded-joint radiator return Straight type (Eurocone)	83
2355 1212 01	Steel pipe adapter with external thread	33	2925 1234 01	Threaded-joint radiator return Corner type (Eurocone)	84
2355 3434 01	Steel pipe adapter with external thread	33	2915 1200 01	Threaded-joint radiator returns Straight type (internal thread)	85
2355 3812 01	Steel pipe adapter with external thread	33	2915 3400 01	Threaded-joint radiator returns Straight type (internal thread)	85
2355 3838 01	Steel pipe adapter with external thread	33	2915 3800 01	Threaded-joint radiator returns Straight type (internal thread)	85
2355 5454 01	Steel pipe adapter with external thread	33	2905 1200 01	Threaded-joint radiator returns Corner type (internal thread)	86
2355 6464 01	Steel pipe adapter with external thread	33	2905 3400 01	Threaded-joint radiator returns Corner type (internal thread)	86
2354 1234 01	Steel pipe adapter with Eurocone external thread	31	2905 3800 01	Threaded-joint radiator returns Corner type (internal thread)	86
2354 3434 01	Steel pipe adapter with Eurocone external thread	31	2249 3435 01	Two-pipe terminal blocks straight type	65
2354 3834 01	Steel pipe adapter with Eurocone external thread	31	2249 3436 01	Two-pipe terminal blocks straight type	65
2353 1234 01	Steel pipe adapter with Eurocone internal thread	30			
2353 3834 01	Steel pipe adapter with Eurocone internal thread	30			
2947 0001 01	Sealing cap	135			
2810 0279 13	Sealing cap with strap	134			
2356 1212 01	Steel pipe adapter with internal thread	32			
2356 3812 01	Steel pipe adapter with internal thread	32			
2810 0320 20	Steel pipe adapter case	15			
2859 3435 01	Telescopic adapter	57			
2559 3434 01	Telescopic adapter	57			
2559 3435 01	Telescopic adapter	57			
2559 3436 01	Telescopic adapter	57			
2559 1200 01	Telescopic connections	58			

Item-No	Description	Page
2 257 0021 01	Two-pipe terminal blocks straight type (Quadruple connection)	69
2 257 0022 01	Two-pipe terminal blocks straight type (Quadruple connection)	69
2 218 3435 01	Two-pipe terminal blocks straight type drainable	67
2 218 3436 01	Two-pipe terminal blocks straight type drainable	67
2 249 8435 01	Two-pipe terminal blocks corner type	66
2 249 8436 01	Two-pipe terminal blocks corner type	66
2 218 8435 01	Two-pipe terminal blocks corner type drainable	68
2 218 8436 01	Two-pipe terminal blocks corner type drainable	68
DAT1-CVS13A	Valve insert	137
DAT1-CVS13B	Valve insert	137
DAT1-CVS12B	Valve insert	137
DAT1-HKV200	Valve insert	137
DAT1-QVS001	Valve insert	137
2 257 0008 01	Y pieces	61
2 257 0009 01	Y pieces	61

Heating parts for drinking water systems are particularly marked in this catalog. Our products are suitable for heating systems of buildings, regardless of the type of heating.

To avoid damage and scale formation, the composition of the heat transfer medium should conform to VDI (The Association of German Engineers) guideline 2035. For industry and district heating plants, the AGFW work sheet FW 510 is to be observed. Mineral oils contained in the heat-transfer medium (alternatively, Neo-Fermit and other lubricants of the type that contain mineral oil) cause swelling and, in most cases, the breakdown of EPDM sealings.

The threads of HUMMEL threaded joints are, unless stated otherwise, manufactured according to DIN EN ISO 228-1. We reserve the right to make technical changes, as well as changes to dimensions and design.

DIN EN 16313

HUMMEL single and double connection fittings comply with required figures of DIN EN 16313. HUMMEL compression fittings also comply with the functional dimensions of DIN EN 16313. By combining a HUMMEL compression fitting with a part from other manufacturers it has to be ensured that this part has been manufactured in compliance with DIN EN 16313.

Assembly instructions

Our assembly instructions are enclosed with our products or available online in our technical center at www.hummel.com. For further requests a personal contact person will be happy to provide you with detailed information.

DIN ISO 9001

HUMMEL supplies certified quality according to DIN ISO 9001 and sets with this high demands towards the own products, as well as towards the suppliers. Only standardized and certified copper alloys of well-known European semi-finished product plants getting used in production.



to the pressure loss diagrams

SOLUTIONS FOR HEATING AND DRINKING WATER SYSTEMS

Solutions for drinking water systems

Steel pipe adapters, compression fittings, connection fittings, nipples




Connection fittings

Reductions, coupling angle, steel pipe adapters, compression fittings



Radiator connections

Diversers, flexible connections, connection fittings, thermostatic valves and heads



Draining and Venting

Air vents, automatic venting, draining valves, inflow and outflow apparatus



HUMMEL AG

Lise-Meitner-Straße 2
79211 Denzlingen
Germany

Tel.
Fax
E-Mail

+49 (0) 76 66 / 9 11 10 - 400
+49 (0) 76 66 / 9 11 10 - 9420
plh@hummel.com

www.hummel.com