


## VariaPro

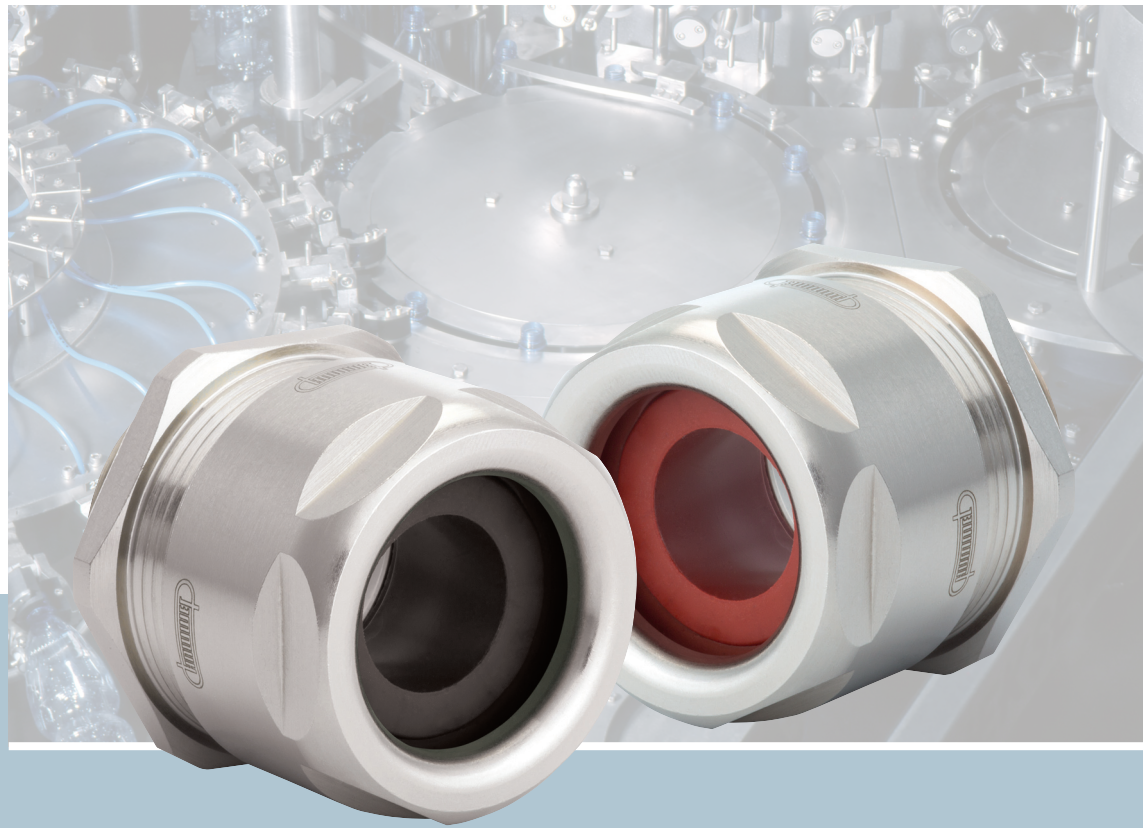

**VariaPro**

CABLE GLANDS FOR SPECIAL CHALLENGES



## Outstanding technical properties

The cable glands of the VariaPro series convince with numerous technical features. Outstanding are the uniquely large clamping ranges of the individual size variants. For the user, this means high flexibility, easy procurement and lean warehousing.

User-friendly is also the simple assembly. Two different wrench sizes on one screw connection make it easier for the installer to tighten. The optimized ergonomics also ensure a better hold of the tool. An EMC connection is already integrated as standard.

### Technical features:

- // Uniquely large clamping ranges
- // Available sizes from M 12 to M 63
- // Protection class IP 68 up to 10 bar / 30 min
- // Integrated EMC connection as standard
- // Robust design and slim structure
- // Easy mounting

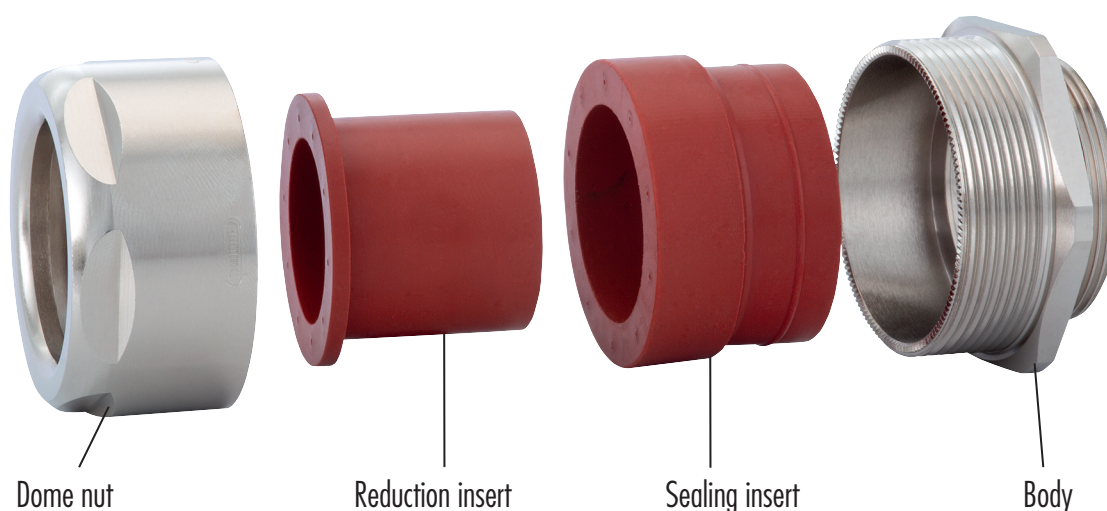

# VariaPro: Two for all cases

Demanding markets with special challenges - these are the ideal conditions for VariaPro. The new cable glands are designed for extreme environments. The product family includes four variants with different capabilities for very special requirements. But they all have one thing in common: the HUMMEL quality appreciated by customers.

## VariaPro Rail:

This cable gland for the railway sector has passed all tests of the fire protection standards DIN EN 45545-2 and 45545-3 and can be used in all trains of the European network without restriction.

## VariaPro Temp:

With a temperature range of -60 °C to 200 °C this fitting is suitable for both arctic outdoor use as well as for industrial high temperature applications.



VariaPro Rail

Metr.




|                       |                                                    |
|-----------------------|----------------------------------------------------|
| Material              | Nickel plated brass                                |
| Seal / O-Ring         | EPDM                                               |
| Protection            | IP 68 – 10 bar within the specified clamping range |
| Operating Temperature | - 40 °C – 100 °C (- 40 °F – 212 °F)                |

- // DIN EN 45545-2 and DIN EN 45545-3
- // Fire resistance E30

EN 45545

RoHS


EMC



- // DIN EN 45545-2 and DIN EN 45545-3
- // Fire resistance E30
- // For all trains in the European network
- // Integrated EMC connection
- // Large clamping range due to reducing insert
- // Integrated anti-twist protection during cable installation


| AG | mm | GL | H<br>mm | <br>mm<br>Dome Nut | <br>mm<br>Body | Number |
|----|----|----|---------|--------------------|----------------|--------|
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |
|    |    |    |         |                    |                |        |

\* Versions with removable reducers

**VariaPro Temp**
**Metr.**


|                       |                                                    |
|-----------------------|----------------------------------------------------|
| Material              | Nickel plated brass                                |
| Seal / O-Ring         | VMQ (Silikon)                                      |
| Protection            | IP 68 – 10 bar within the specified clamping range |
| Operating Temperature | -60 °C – 200 °C                                    |

- // Suitable for absolute low temperature applications
- // Also ideal for high temperatures up to 200 °C

**RoHS** **EMC**


- // For applications under extreme conditions
- // Suitable for absolute low temperature applications
- // Also ideal for high temperatures up to 200 °C
- // Integrated EMC connection
- // Large clamping range due to reducing insert
- // Integrated anti-twist protection during cable installation

| AG         | Ø<br>mm | GL  | H<br>mm | mm<br>Dome Nut | mm<br>Body | Number         |
|------------|---------|-----|---------|----------------|------------|----------------|
| M 12 x 1,5 | 2–8     | 6,5 | 27      | 16             | 17         | 1.751.1200.50* |
| M 12 x 1,5 | 5–8     | 6,5 | 27      | 16             | 17         | 1.751.1200.51  |
| M 16 x 1,5 | 4–11    | 7   | 32      | 19             | 20         | 1.751.1600.50* |
| M 16 x 1,5 | 7–11    | 7   | 32      | 19             | 20         | 1.751.1600.51  |
| M 20 x 1,5 | 7–14    | 6   | 27      | 22             | 24         | 1.751.2000.50* |
| M 20 x 1,5 | 10–14   | 6   | 27      | 22             | 24         | 1.751.2000.51  |
| M 25 x 1,5 | 11–18   | 7   | 29      | 27             | 30         | 1.751.2500.50* |
| M 25 x 1,5 | 14,5–18 | 7   | 29      | 27             | 30         | 1.751.2500.51  |
| M 32 x 1,5 | 16–25   | 8   | 34      | 36             | 40         | 1.751.3200.50* |
| M 32 x 1,5 | 20,5–25 | 8   | 34      | 36             | 40         | 1.751.3200.51  |
| M 40 x 1,5 | 21–32   | 8   | 40      | 46             | 50         | 1.751.4000.50* |
| M 40 x 1,5 | 26,5–32 | 8   | 40      | 46             | 50         | 1.751.4000.51  |
| M 50 x 1,5 | 31–42   | 9   | 57      | 57             | 57         | 1.751.5000.50* |
| M 50 x 1,5 | 35–42   | 9   | 57      | 57             | 57         | 1.751.5000.51  |
| M 63 x 1,5 | 41–54   | 10  | 58      | 65             | 68         | 1.751.6300.50* |
| M 63 x 1,5 | 46,5–54 | 10  | 58      | 65             | 68         | 1.751.6300.51  |

\* Versions with removable reducers

# ELECTRIC COMPONENTS


## Cable Glands

Polyamide-, Brass- and Stainless steel,  
EMC-connections, Protection Ex e, Ex d, Ex ta



## Circular Connectors

M 12 Power to M 40, INOX, TWILOCK, Industrial Ethernet,  
Power, Signal, Hybrid-Connector, Moulded Cordsets

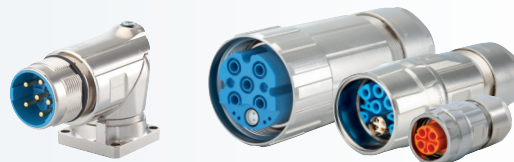


## Conduit Systems

Corrugated Conduit Systems, Conduit Cable Glands,  
combined Cable Glands, Accessories



## Cable Assembly

Moulded Signal- and Power Circular Connectors,  
Servo Cables, Cable Sets

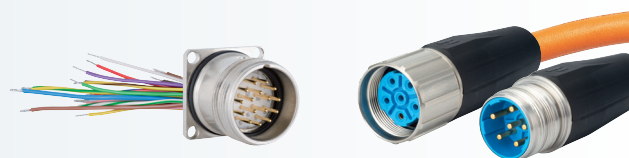

[www.hummel.com](http://www.hummel.com)

HUMMEL AG  
Lise-Meitner-Straße 2  
79211 Denzlingen  
Germany  
[www.hummel.com](http://www.hummel.com)

Tel. +49 (0) 76 66 / 9 11 10-200  
Fax +49 (0) 76 66 / 9 11 10-20  
E-Mail [info@hummel.com](mailto:info@hummel.com)

