


VariaPro

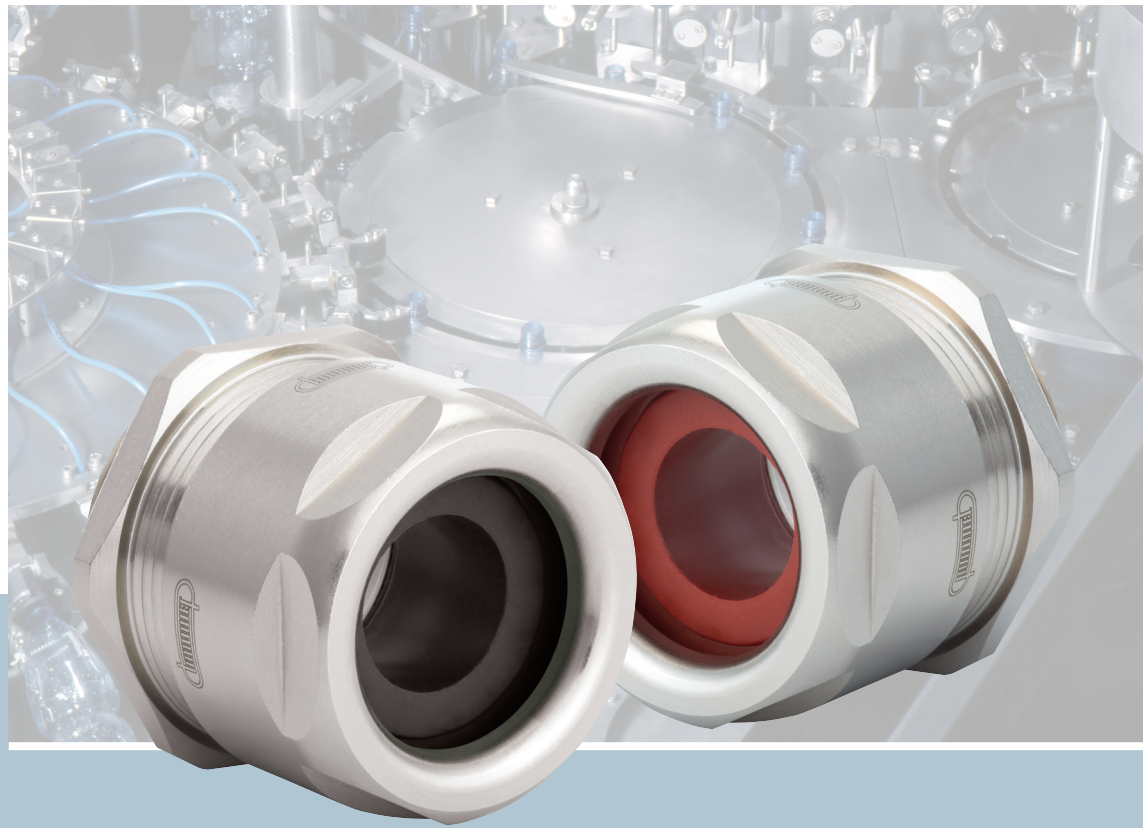

VariaPro

CABLE GLANDS FOR SPECIAL CHALLENGES

VariaPro: Two for all cases

Demanding markets with special challenges - these are the ideal conditions for VariaPro. The new cable glands are designed for extreme environments. The product family includes four variants with different capabilities for very special requirements. But they all have one thing in common: the HUMMEL quality appreciated by customers.

VariaPro Rail:

This cable gland for the railway sector has passed all tests of the fire protection standards DIN EN 45545-2 and 45545-3 and can be used in all trains of the European network without restriction.

VariaPro Temp:

With a temperature range of -60°C to 200°C this fitting is suitable for both arctic outdoor use as well as for industrial high temperature applications.





Outstanding technical properties

The cable glands of the VariaPro series convince with numerous technical features. Outstanding are the uniquely large clamping ranges of the individual size variants. For the user, this means high flexibility, easy procurement and lean warehousing.

User-friendly is also the simple assembly. Two different wrench sizes on one screw connection make it easier for the installer to tighten. The optimized ergonomics also ensure a better hold of the tool. An EMC connection is already integrated as standard.

Technical features:


- // Uniquely large clamping ranges
- // Available sizes from M 12 to M 63
- // Protection class IP 68 up to 10 bar / 30 min
- // Integrated EMC connection as standard
- // Robust design and slim structure
- // Easy mounting

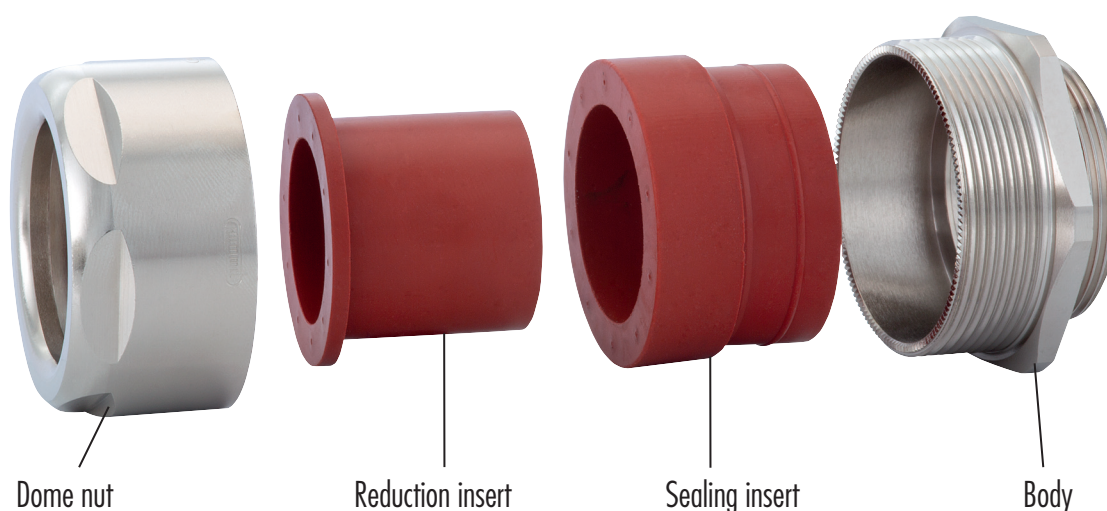

VariaPro Rail
Metr.


Material	Nickel plated brass
Seal/O-Ring	EPDM
Protection	IP 68 – 10 bar within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)


// DIN EN 45545-2 and DIN EN 45545-3
// Fire resistance E30



- // DIN EN 45545-2 and DIN EN 45545-3
- // Fire resistance E30
- // For all trains in the European network
- // Integrated EMC connection
- // Large clamping range due to reducing insert
- // Integrated anti-twist protection during cable installation


AG	$\varnothing$ mm	GL	H mm	 mm Dome Nut	 mm Body	Number
M 12 x 1,5	2–8	6,5	27	16	17	1.750.1200.50*
M 12 x 1,5	5–8	6,5	27	16	17	1.750.1200.51
M 16 x 1,5	4–11	7	32	19	20	1.750.1600.50*
M 16 x 1,5	7–11	7	32	19	20	1.750.1600.51
M 20 x 1,5	7–14	6	27	22	24	1.750.2000.50*
M 20 x 1,5	10–14	6	27	22	24	1.750.2000.51
M 25 x 1,5	11–18	7	29	27	30	1.750.2500.50*
M 25 x 1,5	14,5–18	7	29	27	30	1.750.2500.51
M 32 x 1,5	16–25	8	34	36	40	1.750.3200.50*
M 32 x 1,5	20,5–25	8	34	36	40	1.750.3200.51
M 40 x 1,5	21–32	8	40	46	50	1.750.4000.50*
M 40 x 1,5	26,5–32	8	40	46	50	1.750.4000.51
M 50 x 1,5	31–42	9	57	57	57	1.750.5000.50*
M 50 x 1,5	35–42	9	57	57	57	1.750.5000.51
M 63 x 1,5	41–54	10	58	65	68	1.750.6300.50*
M 63 x 1,5	46,5–54	10	58	65	68	1.750.6300.51

* Versions with removable reducers

VariaPro Temp
Metr.


Material	Nickel plated brass
Seal / O-Ring	VMQ (Silikon)
Protection	IP 68 – 10 bar within the specified clamping range
Operating Temperature	-60 °C – 200 °C

- // Suitable for absolute low temperature applications
- // Also ideal for high temperatures up to 200 °C

RoHS **EMC**


- // For applications under extreme conditions
- // Suitable for absolute low temperature applications
- // Also ideal for high temperatures up to 200 °C
- // Integrated EMC connection
- // Large clamping range due to reducing insert
- // Integrated anti-twist protection during cable installation

AG	Ø mm	GL	H mm	mm Dome Nut	mm Body	Number
M 12 x 1,5	2–8	6,5	27	16	17	1.751.1200.50*
M 12 x 1,5	5–8	6,5	27	16	17	1.751.1200.51
M 16 x 1,5	4–11	7	32	19	20	1.751.1600.50*
M 16 x 1,5	7–11	7	32	19	20	1.751.1600.51
M 20 x 1,5	7–14	6	27	22	24	1.751.2000.50*
M 20 x 1,5	10–14	6	27	22	24	1.751.2000.51
M 25 x 1,5	11–18	7	29	27	30	1.751.2500.50*
M 25 x 1,5	14,5–18	7	29	27	30	1.751.2500.51
M 32 x 1,5	16–25	8	34	36	40	1.751.3200.50*
M 32 x 1,5	20,5–25	8	34	36	40	1.751.3200.51
M 40 x 1,5	21–32	8	40	46	50	1.751.4000.50*
M 40 x 1,5	26,5–32	8	40	46	50	1.751.4000.51
M 50 x 1,5	31–42	9	57	57	57	1.751.5000.50*
M 50 x 1,5	35–42	9	57	57	57	1.751.5000.51
M 63 x 1,5	41–54	10	58	65	68	1.751.6300.50*
M 63 x 1,5	46,5–54	10	58	65	68	1.751.6300.51

* Versions with removable reducers

ELECTRIC COMPONENTS


Cable Glands

Polyamide-, Brass- and Stainless steel,
EMC-connections, Protection Ex e, Ex d, Ex ta



Circular Connectors

M 12 Power to M 40, INOX, TWILOCK, Industrial Ethernet,
Power, Signal, Hybrid-Connector, Moulded Cordsets

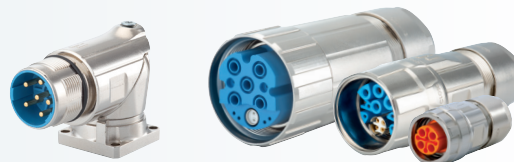


Conduit Systems

Corrugated Conduit Systems, Conduit Cable Glands,
combined Cable Glands, Accessories



Cable Assembly

Moulded Signal- and Power Circular Connectors,
Servo Cables, Cable Sets

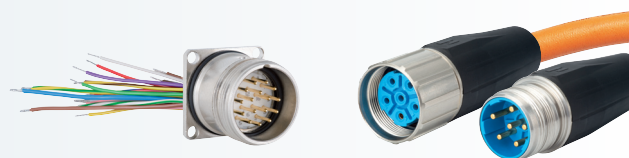

www.hummel.com

HUMMEL AG
Lise-Meitner-Straße 2
79211 Denzlingen
Germany
www.hummel.com

Tel. +49 (0) 76 66 / 9 11 10-200
Fax +49 (0) 76 66 / 9 11 10-20
E-Mail info@hummel.com

