

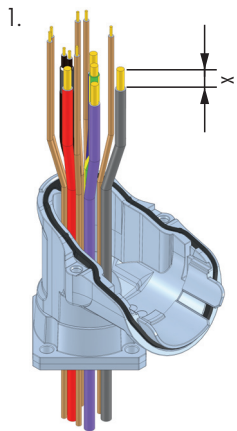
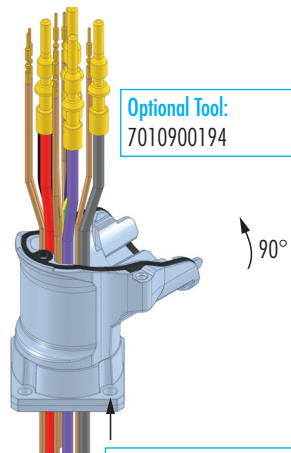


Assembly Instructions

Right Angle Panel Connector TWILOCK-S Hybrid

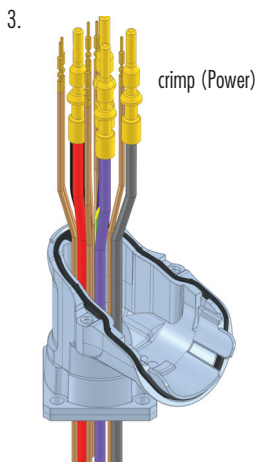


! x
 Ethernet = max. 4 mm stripping length
 Signal = max. 4 mm stripping length
 Power / PE = max. 10 mm stripping length

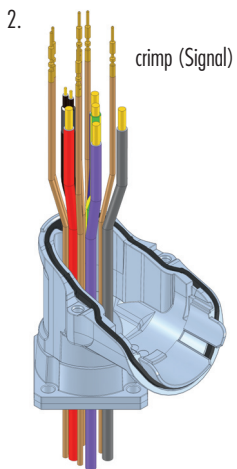

Optional Tool:
7010900194

TIPP:
mount screw No. 4 now

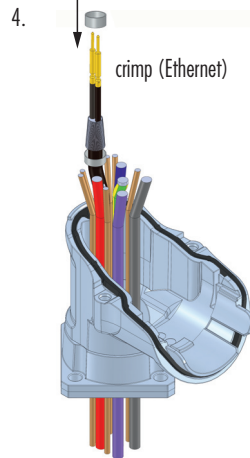

TIPP: Put metal ring over conductors between step 4 and 5

TIPP:
use heat shrink for Ethernet

