


EXIOS +Barrier nickel plated brass

Item number 1606500350

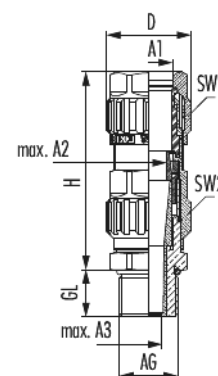

Technical data

Material	Nickel-plated brass
Seal	VMQ (silicone)
Material o-ring	VMQ (silicone)
Clamping insert	Polyamide 6
Armour	Metallic armour or screen
Compound	Two-component epoxy compound
Protection class	IP 66 , IP 67 , IP 68 - 5bar/30min
Ex-protection level	Class I Div 2 Groups A,B,C,D , Class II Div 1 Groups E,F,G , I M2 Ex de , I M2 Ex ta IIIC Da , I Mb IIC Gb
Temperature range	-60°C to +85°C
Variant	Metric
External thread (AG)	M50 x 1,5
Size	50
A1	36 - 52,6 mm
max. A2	44,2 mm
max. A3	37,5 mm

EXIOS +Barrier nickel plated brass

Item number 1606500350

Thread length (GL)	16 mm
Height (H)	116.3 mm
Wrench size (SW1/SW2)	65/65 mm
D	73 mm
max. No. cores	85
Armouring clamping ring 1	0 – 1 mm
Armouring clamping ring 2	1,5 – 2,5 mm
Tightening torque	60 Nm



EXIOS +Barrier nickel plated brass

Item number 1606500350

Commercial data

Packaging Unit	1
EAN code	4033878428412
Weight	1.365 kg
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-34
Customs tariff number	74198090

Note:

