


# EXIOS +Standard nickel plated brass

Item number 1605340370

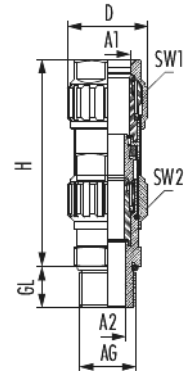

## Technical data

<b>Material</b>	Nickel-plated brass
<b>Seal</b>	VMQ (silicone)
<b>Material o-ring</b>	VMQ (silicone)
<b>Clamping insert</b>	Polyamide 6
<b>Armour</b>	Metallic armour or screen
<b>Protection class</b>	IP 66 , IP 67 , IP 68 - 5bar/30min
<b>Ex-protection level</b>	Class I Div 2 Groups A,B,C,D , Class II Div 1 Groups E,F,G , II 1D Ex ta IIC Da
<b>Temperature range</b>	-60 °C to +105 °C
<b>Variant</b>	NPT
<b>External thread (AG)</b>	NPT 3/4"
<b>Size</b>	25
<b>A1</b>	16,9 - 26 mm
<b>A2</b>	12,5 - 20,5 mm
<b>Thread length (GL)</b>	20.5 mm
<b>Height (H)</b>	91 mm

# EXIOS +Standard nickel plated brass

Item number 1605340370

Wrench size (SW1/SW2)	36/36 mm
D	42 mm
Armouring clamping ring 1	0 - 0,7 mm
Armouring clamping ring 2	1,3 - 2 mm
Armouring clamping ring 3 (optional)	0,7 - 1,4 mm
Tightening torque	18 Nm

# EXIOS +Standard nickel plated brass

Item number 1605340370

## Commercial data

Packaging Unit	5
EAN code	4033878427699
Weight	0.39 kg
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-34
Customs tariff number	74198090

Note:

