


EXIOS +Standard nickel plated brass

Item number 1605520370

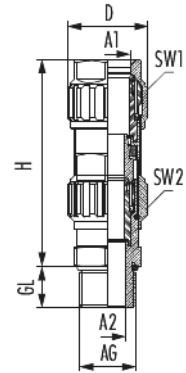

Technical data

| | |
|-----------------------------|--|
| Material | Nickel-plated brass |
| Seal | VMQ (silicone) |
| Material o-ring | VMQ (silicone) |
| Clamping insert | Polyamide 6 |
| Armour | Metallic armour or screen |
| Protection class | IP 66 , IP 67 , IP 68 - 5bar/30min |
| Ex-protection level | Class I Div 2 Groups A,B,C,D , Class II Div 1 Groups E,F,G , II 1D Ex ta IIIC Da |
| Temperature range | -60 °C to +105 °C |
| Variant | NPT |
| External thread (AG) | NPT 2 1/2" |
| Size | 63 |
| A1 | 46 - 65,3 mm |
| A2 | 39,9 - 56,3 mm |
| Thread length (GL) | 40 mm |
| Height (H) | 144.5 mm |



EXIOS +Standard nickel plated brass

Item number 1605520370

| | |
|--------------------------------------|--------------|
| Wrench size (SW1/SW2) | 80/80 mm |
| D | 90 mm |
| Armouring clamping ring 1 | 0 - 1 mm |
| Armouring clamping ring 2 | 1,5 - 2,5 mm |
| Armouring clamping ring 3 (optional) | 1 - 2 mm |
| Tightening torque | 65 Nm |

EXIOS +Standard nickel plated brass

Item number 1605520370

Commercial data

| | |
|-----------------------|---------------|
| Packaging Unit | 1 |
| EAN code | 4033878427811 |
| ETIM 7 | EC000441 |
| ETIM 8 | EC000441 |
| ETIM 9 | EC000441 |
| Customs tariff number | 74198090 |

Note:

