


EXIOS +Barrier nickel plated brass

Item number 1606640370

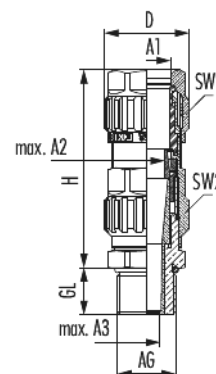

Technical data

Material	Nickel-plated brass
Seal	VMQ (silicone)
Material o-ring	VMQ (silicone)
Clamping insert	Polyamide 6
Armour	Metallic armour or screen
Compound	Two-component epoxy compound
Protection class	IP 66 , IP 67 , IP 68 - 5bar/30min
Ex-protection level	Class I Div 2 Groups A,B,C,D , Class II Div 1 Groups E,F,G , I M2 Ex de , I M2 Ex ta IIIC Da , I Mb IIC Gb
Temperature range	-60°C to +85°C
Variant	NPT
External thread (AG)	NPT 1 1/2"
Size	40
A1	28 - 41 mm
max. A2	33,2 mm
max. A3	27,6 mm



EXIOS +Barrier nickel plated brass

Item number 1606640370

Thread length (GL)	26.5 mm
Height (H)	94.4 mm
Wrench size (SW1/SW2)	55/55 mm
D	64 mm
max. No. cores	70
Armouring clamping ring 1	0 – 0,7 mm
Armouring clamping ring 2	1,3 – 2 mm
Tightening torque	50 Nm

EXIOS +Barrier nickel plated brass

Item number 1606640370

Commercial data

Packaging Unit	1
EAN code	4033878428535
Weight	1.03 kg
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-34
Customs tariff number	74198090

Note:



Dimensions and specifications may be changed without prior notice

www.hummel.com