
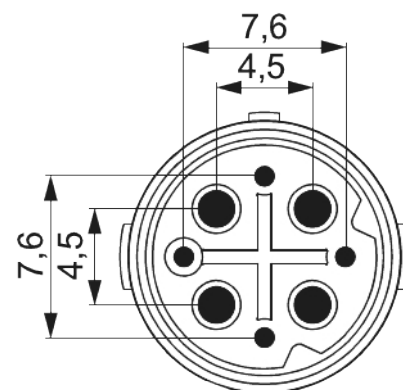


Contact insert M16 - 8-pole (solder in)

Item number 7001943127

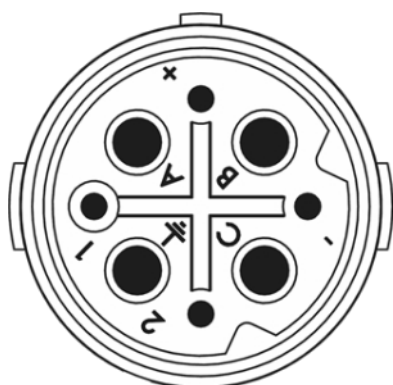

Technical data

Characteristic of connection	PCB assembly
Number of poles	8
Pole picture	4 + 3 + PE
Coding	PE
Dip solder contacts length	10 mm
Insert	Pin
Material insulating body	PA 6 , PBT
Number of contacts signal	4
Number of contacts power	3
Number of contacts PE	1
Contact-Ø signal	0.8 mm
Contact-Ø power	1.6 mm
Nominal current signal	5 A
Nominal current power	16 A
Nominal voltage at degree of pollution 3 signal	160 V \sim



Contact insert M16 - 8-pole (solder in)

Item number 7001943127

Nominal voltage at degree of pollution 3 power	320 V~
Test voltage signal	1500 V~
Test voltage power	1500 V~
Insulation resistance signal	$> 10^8 \Omega$
Insulation resistance power	$> 10^8 \Omega$
max. contact resistance signal	3 mOhm
Temperature range	-40°C to +125°C
Degree of Protection	3
Flammability	V-0 (UL 94)



Contact insert M16 - 8-pole (solder in)

Item number 7001943127

Commercial data

Packaging Unit	25
EAN code	4033878500842
Weight	0.00671 kg
ETIM 7	EC003557
ETIM 8	EC003557
ETIM 9	EC003557
eCl@ss 10.1	27440223
Customs tariff number	85366930

Note:

