


Item number 7084954102

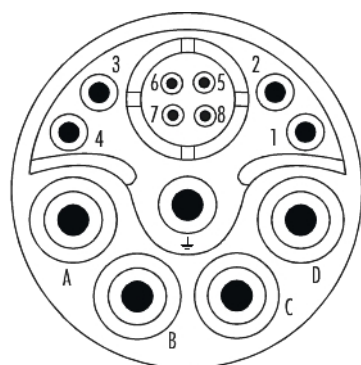

Ansicht: Steckseite  
View: mating side

#### Technical data

|                              |                |
|------------------------------|----------------|
| Characteristic of connection | Crimp          |
| Number of poles              | 13             |
| Pole picture                 | 4 + 4 + 4 + PE |
| Coding                       | PE             |
| Insert                       | Socket         |
| Color Ethernet insert        | white          |
| Color contact insert         | blue           |
| Material Ethernet insert     | PBT            |
| Material insulating body     | PBT            |
| Number of contacts data      | 4              |
| Number of contacts signal    | 4              |
| Number of contacts power     | 4              |
| Number of contacts PE        | 1              |
| Contact-Ø data               | 0.8 mm         |
| Contact-Ø signal             | 1 mm           |
| Contact-Ø power              | 2 mm           |



Item number 7084954102

|                                                 |                         |
|-------------------------------------------------|-------------------------|
| Nominal current signal                          | 8 A                     |
| Nominal current power                           | 28 A                    |
| Nominal voltage at degree of pollution 3 signal | 50 V~                   |
| Nominal voltage at degree of pollution 3 power  | 600 V~                  |
| Insulation resistance data                      | 10 <sup>8</sup>         |
| Insulation resistance signal                    | 10 <sup>8</sup>         |
| Insulation resistance power                     | 10 <sup>8</sup>         |
| max. contact resistance data                    | 3 mOhm                  |
| max. contact resistance signal                  | 3 mOhm                  |
| max. contact resistance power                   | 3 mOhm                  |
| Temperature range                               | -40 °C to +125 °C       |
| Degree of Protection                            | 3                       |
| Suitable data contacts                          | 7010980812              |
| Suitable Signal contacts                        | 7015961002 , 7015961012 |
| Suitable power contacts                         | 7010942022 , 7010942024 |
| Suitable PE-/FE-contacts                        | 7010942022 , 7010942024 |



Item number 7084954102

Commercial data

|                       |               |
|-----------------------|---------------|
| Packaging Unit        | 25            |
| EAN code              | 4033878011850 |
| Weight                | 0.00798 kg    |
| ETIM 7                | EC003557      |
| ETIM 8                | EC003557      |
| ETIM 9                | EC003557      |
| Customs tariff number | 85366990      |

Note:

