


Housing TWILOCK-S panel connector M40

Power angled

Item number 774906200S

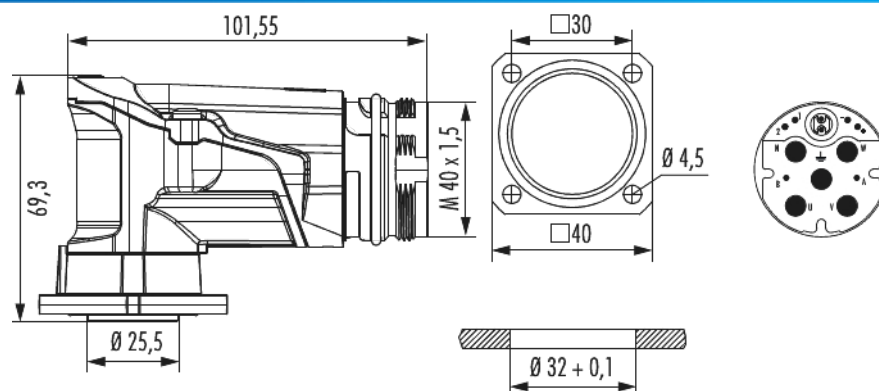

Technical data

Housing type	Panel angled
Material housing	Zinc Die Cast
Material housing surface	blue passivated
Insert	Pin
Version	right angled , TWILOCK-S
External thread plug-in side	M40 x 1,5
TWILOCK thread	M40 x 1,5
Shield	unshielded
Seal type	O-Ring
Material seals/o-rings	FKM (FPM) , HNBR
Rotatable	330 °
Panel hole	Ø 32 + 0,1 mm
Flange	40 x 40 mm
Hole distance	30 mm
Hole diameter	4 x Ø 4,5 mm
Length (L)	103 mm



Housing TWILOCK-S panel connector M40

Power angled

Item number 774906200S

Allen key/Torx	T20
Wrench size (SW1/SW2)	/ mm
Temperature range	-40°C to +125°C
Degree of Protection	3
Protection class	IP 67 , IP 69 K
Characteristic of connection	Crimp
Number of poles	13
Pole picture	2 + 6 + 4 + PE
Color Ethernet insert	white
Color contact insert	blue
Material insulating body	PBT
Material Ethernet insert	PA 6
Number of contacts data	2
Number of contacts signal	6
Number of contacts power	4
Number of contacts PE	1
Contact-Ø data	1 mm
Contact-Ø signal	1 mm
Contact-Ø power	3.6 mm
Terminal cross section data	0,14 – 1 mm ²
Terminal cross section signal	0,14 – 1,5 mm ²
Terminal cross section power	2,5 – 10 mm ²
Crimp range	0.14 – 10 mm ²
Nominal current data	1,2 A
Nominal current signal	7 A



Housing TWILOCK-S panel connector M40

Power angled

Item number 774906200S

Nominal current power	55 A
Nominal voltage at degree of pollution 3 data	30 V~
Nominal voltage at degree of pollution 3 signal	150 V~
Nominal voltage at degree of pollution 3 power	600 V~
Test voltage data	840 V~
Test voltage signal	840 V~
Test voltage power	4000 V~
Insulation resistance data	10 ⁸
Insulation resistance signal	10 ⁸
Insulation resistance power	10 ⁸
max. contact resistance data	0,003 mOhm
max. contact resistance signal	3 mOhm
max. contact resistance power	1 mOhm
Flammability	V-0 (UL 94)
Minimum mating cycles	> 500
Suitable data contacts	7015961001
Suitable Signal contacts	7015961001 , 7015961011
Suitable power contacts	7015963601 , 7015963611 , 7015963621 , 7015963631
Suitable PE-/FE-contacts	7015963601 , 7015963611 , 7015963621 , 7015963631



Housing TWILOCK-S panel connector M40

Power angled

Item number 774906200S

Commercial data

Packaging Unit	10
EAN code	4033878012611
Weight	0.47905 kg
ETIM 7	EC002635
ETIM 8	EC002635
ETIM 9	EC002635
eCl@ss 10.1	27440102
Customs tariff number	85366990

Note:

